

TEJAS

2023 Edition

TEJAS LIGHTING CO., LTD

Tel: + 852 2866 6322

info@tejas.com.hk

www.tejas.com.hk





TEJAS LIGHTING

TEJAS Lighting Company Limited founded in 2014 with headquarters in Hong Kong and Factory located in Dongguan, which is a research, development and manufacturing center in providing LED lighting manufacturing design, sales, production, installation and service.

Main business: LED ceiling recessed downlight, LED spot light, LED pendant light, LED surface downlight and custom made product. Our products are inspired from the original simple and stylish design. Our company adheres to innovation, quality, service, conservation, absorb new ideas,

The quality of all products are subject to strict control and full-service tracking. We aim to make high-quality products and continuous improvement of product quality.

The simple and stylish design making excellent mix effect. It makes gained a great demand in the overseas market.

Downlight Series

Front ring diameter : Ø 28 - Ø 59

Ø 33



TORCH 2/6/8W

p.12

Ø 33



TORCH 2/6/8W W

Ø 33



TORCH 2/6/8W SPOT

p.13

Ø 33



TORCH 6W T

p.14

Ø 28



TORCH TRIMLESS

p.15

Ø 47



TUBO

p.16

Ø 55



TINNIE

p.17

Ø 50



TORRES XS

p.18

Ø 42



TORRES XS TRIMLESS

p.19

Front ring diameter : Ø 60 - Ø 109

Ø 70 TW



TORRES S

Ø 70 TW



TORRES S W

70 x 70 TW



TORRES S SQ TRIMLESS

62 x 62 TW



TORRES S TRIMLESS

Ø 62 TW



TORRES S W TRIMLESS

p.20

Ø 62 TW



Ø 70 NEW



TORRES SE

p.24

Ø 96



TADDEO 80

p.28

Ø 104



TADDEO 80T

p.29

Ø 94



TADDEO I

Ø 94



TADDEO I AJ

Ø 94



TADDEO I W

Ø 100



TADDEO I PLUS

Ø 100



TADDEO I AJ PLUS

p.30

Ø 90



TADDEO I TRIMLESS

p.30

Ø 90



TADDEO I AJ TRIMLESS

p.32

Ø 103



TOPS WG

p.32

Ø 108



TONI

p.33

Front ring diameter : Ø 110 - Ø 200

Ø 112



TADDEO 100 V2

p.35

Ø 116



TADDEO 100

p.34

Ø 100 TW



TORRES M W TRIMLESS


p.36

Ø 100 TW



TORRES M TRIMLESS

100 x 100 TW



TORRES M SQ TRIMLESS

111 x 111 TW



TORRES M SQ

Ø 111 TW



TORRES M W

Ø 111 TW



TORRES M

Ø 136



TADDEO III W

p.44

Ø 136



TADDEO III AJ

Ø 136



TADDEO III

Ø 193 TW



TYCO 8

p.41

Ø 160 TW



TYCO 6

Ø 113




TYCO 4

p.40

Square trim


104 x 104



TETRIX

p.48

298 x 185



T-BOX DOU

p.47

158 x 185



T-BOX SIN

p.46

Recessed Spotlight

Ø 62



TASS 20W R

p.50

Tracklight Series

TUBE series : Ø 36



TUBE 10W H

p.56



TUBE 10W H2

p.57

TRAC series : Ø 52



TRAC AC 10W

p.58



TRAC SPOT

p.59



TRAC 15W

p.60



TRAC 15W H/ H2



TRAC 25W H/ H2



TRAC 15W D

p.62



TRAC 25W D

p.63

TASS series : Ø 62



TASS AC 14W

p.64



TASS SPOT

p.65



TASS 20W

p.66



TASS 25W D TW

p.67



TASS 20W Z

p.70



TASS 20W ZZD

p.71



TASS 17W H/ H2



TASS 25W H/ H2



TASS 32W H/ H2



TASS 17W D



TASS 25W D



TASS 32W D

p.68

p.69

TEDD series : Ø 80



TEDD 30W

p.72



TEDD 25/35W H



TEDD 40W D

p.73

TREY series : Ø 86



TREY 25/30W



TREY 30W TW

p.74

p.75

Surface Mount Series



TITAN 30W TW

p.84



TITAN 30/40W

p.83



TITAN 20W

p.82



TRON 10/20W

p.81



TUBE 10W T

p.80

Surface Mount /Surface Spotlight /Pendant Series

TRAC series : Ø 52



TRAC 15W S

p.90



TRAC 15W P



TRAC 15W T



TRAC AC 10W S

p.88



TRAC AC 10W P



TRAC AC 10W T

TASS series : Ø 62



TASS 20W S

p.94



TASS 20W P



TASS 20W T



TASS AC 14W S

p.92



TASS AC 14W P



TASS AC 14W T

TEDD series : Ø 80



TEDD 30W S

p.96



TEDD 30W P



TEDD 30W T

48V Track Series



TUBE 10W/ EX

p.106




TRAC 13W LV

p.105




TARTAN T

p.103



TARTAN S

p.102



TARTAN TRIMLESS

p.101



TARTAN


p.100

Linear Series





DOWNLIGHT



TORCH series

TORCH 2/6/8W

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warrenty
- IP20

WHITE
BLACK



30° / 40°

Fixed angle

ON/OFF (2W : remote driver 114*52*20mm)
TRIAC, 1-10V, DALI (remote driver: 114*52*20mm)


Specification

Light Sources : COB LED ARRAY
Input Voltage : 220-240V AC / 50-60Hz
Trim : AL. Die-Casting, Electrostatic Powder Coating
Optics : PC Reflector
Reflector : PC
Heat Sink : AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature : -20 to +40°C
Driver Lifetime : 50,000 Hours
Cuthole : ø30mm; for ceiling thickness: 5-25mm

	TORCH 2W	TORCH 6W	TORCH 8W
System Power	2.3W	6.1W	7.8W
LED Power	2W	5.3W	6.4W
Output Current	120mA	300mA	350mA
Output Voltage	16.3V DC	17.5V DC	18.2V DC
Color Consistency	3-SDCM	3-SDCM	3-SDCM
L.O.R	0.9	0.9	0.9
CCT : 2700K ; CRI >90	213 lm	497 lm	533 lm
CCT : 3000K ; CRI >90	228 lm	513 lm	570 lm
CCT : 4000K ; CRI >90	246 lm	553 lm	615 lm
CCT : 5000K ; CRI >90	264 lm	594 lm	660 lm

Accessories

- HONEYCOMB
- CLEARLENS
- FROSTLENS



TORCH 2/6/8W W

Wallwash

Fixed angle


ON/OFF (2W : remote driver 114*52*20mm)
TRIAC, 1-10V, DALI (remote driver: 114*52*20mm)

Light Sources : COB LED ARRAY
Input Voltage : 220-240V AC / 50-60Hz
Trim : AL. Die-Casting, Electrostatic Powder Coating
Optics : PC Reflector
Reflector : PC
Heat Sink : AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature : -20 to +40°C
Driver Lifetime : 50,000 Hours
Cuthole : ø30mm; for ceiling thickness: 5-25mm

	TORCH 2W W	TORCH 6W W	TORCH 8W W
System Power	2.2W	6.3W	7.8W
LED Power	1.9W	4.9W	6.4W
Output Current	120mA	300mA	350mA
Output Voltage	15.8V DC	16.3V DC	18.2V DC
Color Consistency	3-SDCM	3-SDCM	3-SDCM
L.O.R	0.6	0.6	0.6
CCT : 2700K ; CRI >90	258 lm	581 lm	645 lm
CCT : 3000K ; CRI >90	276 lm	621 lm	690 lm
CCT : 4000K ; CRI >90	297 lm	668 lm	742 lm
CCT : 5000K ; CRI >90	297 lm	668 lm	742 lm

Accessories

- HONEYCOMB
- CLEARLENS
- FROSTLENS



TORCH 2/6/8W SPOT

15°


Fixed angle

ON/OFF (2W : remote driver 114*52*20mm)
TRIAC, 1-10V, DALI (remote driver: 114*52*20mm)

Light Sources : SMD
Input Voltage : 220-240V AC / 50-60Hz
Trim : AL. Die-Casting, Electrostatic Powder Coating
Optics : Lens
Reflector : PC
Heat Sink : AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature : -20 to +40°C
Driver Lifetime : 50,000 Hours
Cuthole : ø30mm; for ceiling thickness: 5-25mm

	TORCH 2W SPOT	TORCH 6W SPOT	TORCH 8W SPOT
System Power	2.6W	6.8W	9.7W
LED Power	2.2W	5.8W	8.2W
Output Current	200mA	500mA	700mA
Output Voltage	11V DC	11.5V DC	11.7V DC
Color Consistency	3-SDCM	3-SDCM	3-SDCM
L.O.R	0.8	0.8	0.8
CCT : 2700K ; CRI >90	285 lm	494 lm	665 lm
CCT : 3000K ; CRI >90	308 lm	533 lm	718 lm
CCT : 4000K ; CRI >90	308 lm	533 lm	718 lm
CCT : 5000K ; CRI >90	330 lm	572 lm	770 lm

Accessories



TORCH 6W T



- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warrenty
- IP20



WHITE
BLACK



15° / 24° / 38°

Adjustable +/- 25°

ON/OFF
TRIAC, 1-10V, DALI (remote driver: 114*52*20)




Specification

Light Sources : COB LED ARRAY
Input Voltage : 220-240V AC / 50-60Hz
Trim : AL. Die-Casting, Electrostatic Powder Coating
Optics : Lens
Reflector : /
Heat Sink : AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature : -20 to +40°C
Driver Lifetime : 50,000 Hours
Cuthole : ø30mm; For ceiling thickness : 5-25mm

System Power 6.8W
LED Power 5.8W
Output Current 500mA
Output Voltage 11.6V DC
Color Consistency 3-SDCM
L.O.R. 0.9

CCT : 2700K ; CRI >90 543 lm
CCT : 3000K ; CRI >90 543 lm
CCT : 4000K ; CRI >90 586 lm
CCT : 5000K ; CRI >90 586 lm



Accessories



TORCH Trimless



- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warrenty
- IP20



WHITE
BLACK



30° / 40°

Fixed angle

ON/OFF
TRIAC, 1-10V, DALI (remote driver: 114*52*20)




Specification

Light Sources : COB LED ARRAY
Input Voltage : 220-240V AC / 50-60Hz
Trim : AL. Die-Casting, Electrostatic Powder Coating
Optics : PC Reflector
Reflector : PC
Heat Sink : AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature : -20 to +40°C
Driver Lifetime : 50,000 Hours
Cuthole : ø34mm

System Power 6.3W
LED Power 5.3W
Output Current 300mA
Output Voltage 17.8V DC
Color Consistency 3-SDCM
L.O.R. 0.9

CCT : 2700K ; CRI >90 497 lm
CCT : 3000K ; CRI >90 532 lm
CCT : 4000K ; CRI >90 574 lm
CCT : 5000K ; CRI >90 616 lm



Accessories



TUBO

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warrenty
- IP20 / IP44



- WHITE
- BLACK

- 15° / 24° / 38°
- Fixed angle
- ON/OFF TRIAC, 1-10V, DALI (remote driver: 114*52*20)

Specification


Light Sources : COB LED ARRAY
Input Voltage : 220-240V AC / 50-60Hz
Trim : AL. Die-Casting, Electrostatic Powder Coating
Optics : Lens
Reflector : /
Heat Sink : AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature : -20 to +40°C
Driver Lifetime : 50,000 Hours
Cuthole : ø40mm; For ceiling thickness : 5-25mm

	TUBO 4W	TUBO 6W	TUBO 8W
System Power	4.8W	7.2W	9.6W
LED Power	4W	5.8W	8.2W
Output Current	350mA	500mA	700mA
Output Voltage	11.3V DC	11.6V DC	11.7V DC
Color Consistency	3-SDCM	3-SDCM	3-SDCM

CCT : 2700K ; CRI >90	380 lm	543 lm	665 lm
CCT : 3000K ; CRI >90	410 lm	543 lm	717 lm
CCT : 4000K ; CRI >90	410 lm	586 lm	717 lm
CCT : 5000K ; CRI >90	440 lm	586 lm	770 lm

Accessories

- HONEYCOMB
- CLEARLENS
- FROSTLENS

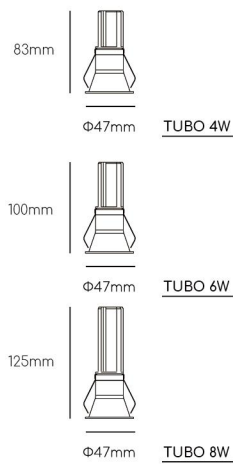

TINNIE

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warrenty
- IP20 / IP44



- WHITE
- BLACK

- 20° / 35° / 55°
- Fixed angle
- ON/OFF, TRIAC, 1-10V, DALI

Specification


Light Sources : COB LED ARRAY
Input Voltage : 220-240V AC / 50-60Hz
Trim : AL. Die-Casting, Electrostatic Powder Coating
Optics : Lens
Reflector : /
Heat Sink : AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature : -20 to +40°C
Driver Lifetime : 50,000 Hours
Cuthole : ø44mm; For ceiling thickness : 5-25mm

	6W
System Power	6W
LED Power	5W
Output Current	140mA
Output Voltage	35.6V DC
Color Consistency	3-SDCM

CCT : 2700K ; CRI >90	400 lm
CCT : 3000K ; CRI >90	424 lm
CCT : 3500K ; CRI >90	434 lm
CCT : 4000K ; CRI >90	444 lm


Accessories

- HONEYCOMB
- CLEARLENS
- FROSTLENS



TORRES XS

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warrenty
- IP20

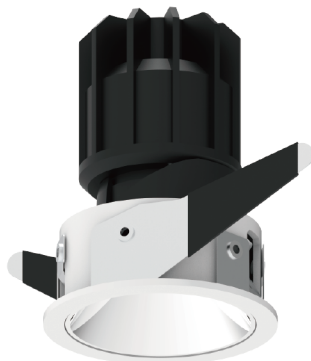

- WHITE
- BLACK

CE

20° / 35° / 55°

Rotation 355°
Adjustable +/- 30°

ON/OFF
TRIAC, 1-10V, DALI (remote driver)

Specification

Light Sources :
Input Voltage :
Trim :
Optics :
Reflector :
Heat Sink :
Operating Temperature :
Driver Lifetime :
Cuthole :

COB LED ARRAY
220-240V AC / 50-60Hz
AL. Die-Casting, Electrostatic Powder Coating
Lens
/
AL. Die-Casting, Electrostatic Powder Coating
-20 to +40°C
50,000 Hours
ø46mm; For ceiling thickness : 5-25mm

System Power
LED Power
Output Current
Output Voltage
Color Consistency

7W
5.8W
160mA
35.6V DC
3-SDCM


CCT : 2700K ; CRI >90
CCT : 3000K ; CRI >90
CCT : 3500K ; CRI >90
CCT : 4000K ; CRI >90

505 lm
536 lm
550 lm
562 lm

Accessories

HONEYCOMB

FROSTFILM

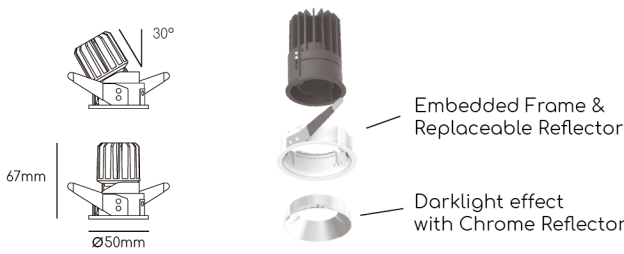

TORRES XS Trimless

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warrenty
- IP20



- WHITE
- BLACK

CE

20° / 35° / 55°

Rotation 355°
Adjustable +/- 30°

ON/OFF
TRIAC, 1-10V, DALI (remote driver: 114*52*20)

Specification

Light Sources :
Input Voltage :
Trim :
Optics :
Reflector :
Heat Sink :
Operating Temperature :
Driver Lifetime :
Cuthole :

COB LED ARRAY
220-240V AC / 50-60Hz
AL. Die-Casting, Electrostatic Powder Coating
Lens
/
AL. Die-Casting, Electrostatic Powder Coating
-20 to +40°C
50,000 Hours
ø45mm

System Power
LED Power
Output Current
Output Voltage
Color Consistency

7W
5.8W
160mA
35.6V DC
3-SDCM


CCT : 2700K ; CRI >90
CCT : 3000K ; CRI >90
CCT : 3500K ; CRI >90
CCT : 4000K ; CRI >90

505 lm
536 lm
550 lm
562 lm

Accessories

HONEYCOMB

FROSTFILM

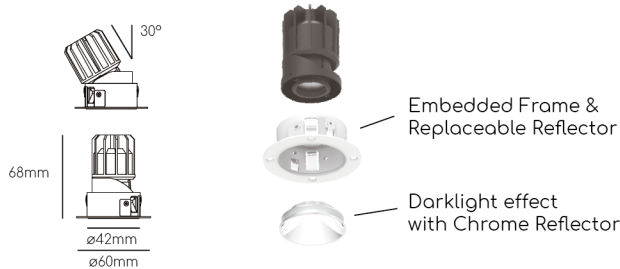

TORRES S series

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warrenty
- IP20



WHITE
BLACK



ON/OFF, TRIAC, 1-10V, DALI

Specification


Light Sources : COB LED ARRAY
Input Voltage : 220-240V AC / 50-60Hz
Trim : AL. Die-Casting, Electrostatic Powder Coating
Optics : Lens
Reflector : AL
Heat Sink : AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature : -20 to +40°C
Driver Lifetime : 50,000 Hours
Ceiling Thickness : 5-25mm

System Power 15.5W
LED Power 12.7W
Output Current 350mA
Output Voltage 36.3V DC
Color Consistency 3-SDCM
L.O.R 0.7

CCT : 2700K ; CRI >90 1103 lm
CCT : 3000K ; CRI >90 1173 lm
CCT : 3500K ; CRI >90 1201 lm
CCT : 4000K ; CRI >90 1229 lm

Accessories

HONEYCOMB CLEARLENS FROSTLENS

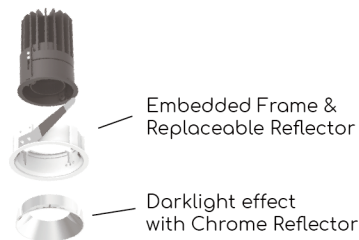

NEW





TORRES S SQ

16° / 25° / 38° / 55°
Rotation 355°
Adjustable +/- 30°


TORRES S SQ TRIMLESS

16° / 25° / 38° / 55°
Rotation 355°
Adjustable +/- 30°

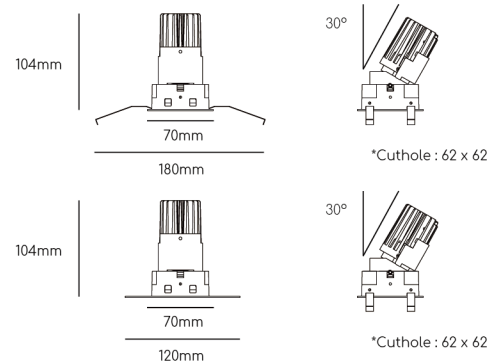


TORRES S

16° / 25° / 38° / 55°
Rotation 355°
Adjustable +/- 30°

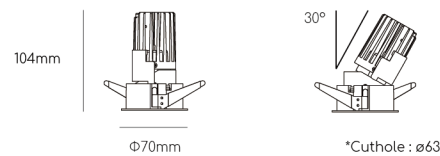


TORRES S W

Wallwash
Optimal wallwashing distance: 600mm*600mm
Rotation 360°

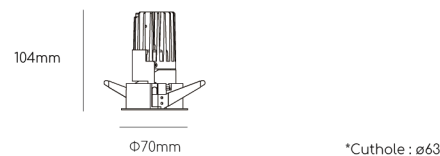

TORRES S TRIMLESS

16° / 25° / 38° / 55°
Rotation 355°
Adjustable +/- 30°

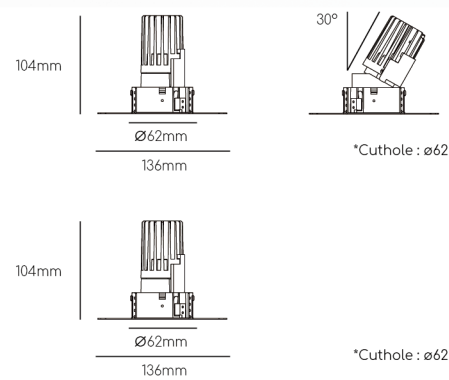

TORRES S W TRIMLESS

Wallwash
Optimal wallwashing distance: 600mm*600mm
Rotation 360°

TORRES S TW series

- High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warranty
- IP20



WHITE
BLACK



DALI

Specification


Light Sources : COB LED ARRAY
Input Voltage : 220-240V AC / 50-60Hz
Trim : AL. Die-Casting, Electrostatic Powder Coating
Optics : Lens
Reflector : AL
Heat Sink : AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature : -20 to +40°C
Driver Lifetime : 50,000 Hours
Ceiling Thickness : 5-25mm

System Power 14W
LED Power 11.6W
Output Current 300mA
Output Voltage 38.5V DC
Color Consistency 3-SDCM

CCT : 2700K ; CRI >90 834 lm
CCT : 6500K ; CRI >90 1060 lm

Accessories

HONEYCOMB CLEARLENS FROSTLENS

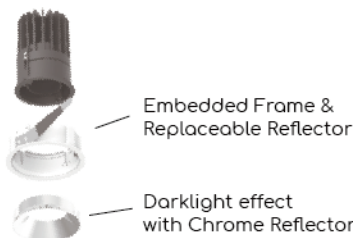


NEW



TORRES S SQ TW

16° / 25° / 38° / 55°
Rotation 355°
Adjustable +/- 30°

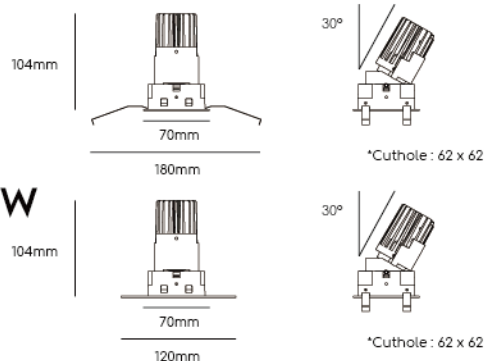


TORRES S SQ TRIMLESS TW

16° / 25° / 38° / 55°
Rotation 355°
Adjustable +/- 30°


TORRES S TW

16° / 25° / 38° / 55°
Rotation 355°
Adjustable +/- 30°

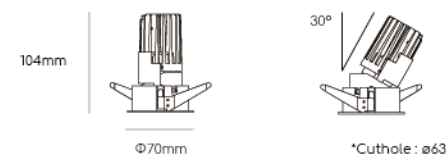


TORRES S W TW

Wallwash
Optimal wallwashing distance: 600mm*600mm
Rotation 360°

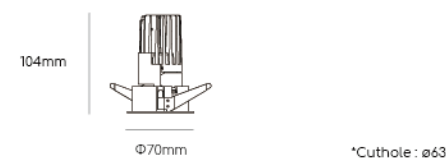


TORRES S TRIMLESS TW

16° / 25° / 38° / 55°
Rotation 355°
Adjustable +/- 30°

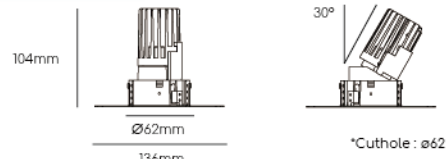

TORRES S W TRIMLESS TW

Wallwash
Optimal wallwashing distance: 600mm*600mm
Rotation 360°

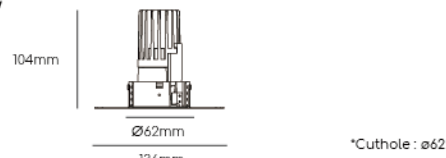

TORRES SE

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warranty
- IP20

preliminary



WHITE
BLACK



16° / 25° / 38° / 55°

Fixed angle

ON/OFF, TRIAC, 1-10V, DALI


Specification

Light Sources : COB LED ARRAY
Input Voltage : 220-240V AC / 50-60Hz
Trim : AL. Die-Casting, Electrostatic Powder Coating
Optics : Lens
Reflector : AL
Heat Sink : AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature : -20 to +40°C
Driver Lifetime : 50,000 Hours
Ceiling Thickness : ø63mm; For ceiling thickness : 5-25mm

System Power 15.5W
LED Power 12.7W
Output Current 350mA
Output Voltage 36.3V DC
Color Consistency 3-SDCM

CCT : 2700K ; CRI >90 1103 lm
CCT : 3000K ; CRI >90 1173 lm
CCT : 3500K ; CRI >90 1201 lm
CCT : 4000K ; CRI >90 1229 lm

95mm



Ø70mm



Embedded Frame

Darklight effect
with Chrome Reflector

Accessories



HONEYCOMB



CLEARLENS



FROSTLENS





TADDEO 80



- Hi-CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warranty
- IP20 / IP44



- WHITE
- BLACK

- CE
- 15° / 25° / 40° / 60°
- Fixed angle
- ON/OFF, TRIAC, 1-10V, DALI

Specification


Light Sources : COB LED ARRAY
Input Voltage : 220-240V AC / 50-60Hz
Trim : AL. Die-Casting, Electrostatic Powder Coating
Optics : PC Reflector
Reflector : PC
Heat Sink : AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature : -20 to +40°C
Driver Lifetime : 50,000 Hours
Cuthole : ø84mm; For ceiling thickness : 5-25mm

System Power 16.1W
LED Power 13.7W
Output Current 400mA
Output Voltage 34.2V DC
Color Consistency 3-SDCM
L.O.R. 0.7

CCT : 2700K ; CRI >90 1573 lm
CCT : 3000K ; CRI >90 1637 lm
CCT : 3500K ; CRI >90 1660 lm
CCT : 4000K ; CRI >90 1663 lm
CCT : 5000K ; CRI >80 1983 lm

Accessories

- HONEYCOMB
- CLEARLENS
- FROSTLENS



TADDEO 80T



- Hi-CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warranty
- IP20 / IP44



- WHITE
- BLACK

- CE
- 15° / 25° / 40° / 60°
- Adjustable +/- 25°
- ON/OFF, TRIAC, 1-10V, DALI

Specification


Light Sources : COB LED ARRAY
Input Voltage : 220-240V AC / 50-60Hz
Trim : AL. Die-Casting, Electrostatic Powder Coating
Optics : PC Reflector
Reflector : PC
Heat Sink : AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature : -20 to +40°C
Driver Lifetime : 50,000 Hours
Cuthole : ø98mm; For ceiling thickness : 5-25mm

System Power 16.1W
LED Power 13.7W
Output Current 400mA
Output Voltage 34.2V DC
Color Consistency 3-SDCM
L.O.R. 0.7

CCT : 2700K ; CRI >90 1573 lm
CCT : 3000K ; CRI >90 1637 lm
CCT : 3500K ; CRI >90 1660 lm
CCT : 4000K ; CRI >90 1663 lm
CCT : 5000K ; CRI >80 1983 lm

Accessories

- HONEYCOMB
- CLEARLENS
- FROSTLENS

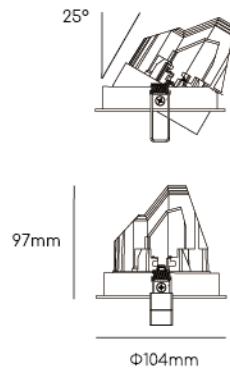

TADDEO I series

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warrenty
- IP20



- WHITE
- BLACK



ON/OFF, TRIAC, 1-10V, DALI

Specification

Light Sources : COB LED ARRAY
Input Voltage : 220-240V AC / 50-60Hz
Trim : AL. Die-Casting, Electrostatic Powder Coating
Optics : Lens
Reflector : PC
Heat Sink : AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature : -20 to +40°C
Driver Lifetime : 50,000 Hours
Ceiling Thickness : 5-25mm

System Power 20.6W
LED Power 17.5W
Output Current 500mA
Output Voltage 35V DC
Color Consistency 3-SDCM
L.O.R 0.6

CCT : 2700K ; CRI >90 1921 lm
CCT : 3000K ; CRI >90 2000 lm
CCT : 3500K ; CRI >90 2027 lm
CCT : 4000K ; CRI >90 2031 lm
CCT : 5000K ; CRI >80 2421 lm


Accessories

- HONEYCOMB
- CLEARLENS
- FROSTLENS



TADDEO I

- 15° / 25° / 40° / 60°
- Fixed angle




TADDEO I & W Cuthole: ø88mm




TADDEO I AJ

- 15° / 25° / 40° / 60°
- Adjustable +/- 25°



Cuthole: ø88mm




TADDEO I W

- Wallwash
- Optimal wallwashing distance: 1000mm*1000mm
- Rotation 360°



TADDEO I PLUS

- 15° / 25° / 40° / 60°
- Fixed angle





Cuthole: ø92mm



TADDEO I AJ PLUS

- 15° / 25° / 40° / 60°
- Adjustable +/- 25°




Cuthole: ø92mm



TADDEO I TRIMLESS

- 15° / 25° / 40° / 60°
- Fixed angle





Cuthole: ø92mm



TADDEO I AJ TRIMLESS

- 15° / 25° / 40° / 60°
- Adjustable +/- 25°



Cuthole: ø92mm

TOPS WG

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warranty
- IP20



CE 15° / 25° / 40° / 60° Adjustable +/- 15° ON/OFF, TRIAC, 1-10V, DALI

Specification	
Light Sources :	COB LED ARRAY
Input Voltage :	220-240V AC / 50-60Hz
Trim :	AL. Die-Casting, Electrostatic Powder Coating
Optics :	PC Reflector
Reflector :	PC
Heat Sink :	AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature :	-20 to +40°C
Driver Lifetime :	50,000 Hours
Cuthole :	ø96mm; For ceiling thickness : 5-25mm


System Power	11.8W
LED Power	10W
Output Current	300mA
Output Voltage	33.3V DC
Color Consistency	3-SDCM
L.O.R.	0.5
CCT : 2700K ; CRI >90	1209 lm
CCT : 3000K ; CRI >90	1258 lm
CCT : 3500K ; CRI >90	1275 lm
CCT : 4000K ; CRI >90	1278 lm
CCT : 5000K ; CRI >80	1523 lm

Accessories

 HONEYCOMB

 CLEARLENS

 FROSTLENS



TONI

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warranty
- IP20 / IP44



CE 15° / 25° / 40° / 60° Adjustable +/- 25° ON/OFF, TRIAC, 1-10V, DALI

Specification	
Light Sources :	COB LED ARRAY
Input Voltage :	220-240V AC / 50-60Hz
Trim :	AL. Die-Casting, Electrostatic Powder Coating
Optics :	Lens
Reflector :	/
Heat Sink :	AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature :	-20 to +40°C
Driver Lifetime :	50,000 Hours
Cuthole :	ø103mm; For ceiling thickness : 5-25mm


System Power	20.6W
LED Power	17.5W
Output Current	500mA
Output Voltage	35V DC
Color Consistency	3-SDCM
L.O.R.	0.6
CCT : 2700K ; CRI >90	1921 lm
CCT : 3000K ; CRI >90	2000 lm
CCT : 3500K ; CRI >90	2027 lm
CCT : 4000K ; CRI >90	2031 lm
CCT : 5000K ; CRI >80	2421 lm

Accessories

 HONEYCOMB

 CLEARLENS

 FROSTLENS



TADDEO 100



- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warranty
- IP20 / IP44



- WHITE
- BLACK

- CE
- 15° / 30° / 60°
- Fixed angle
- ON/OFF, 1-10V, DALI


Specification	
Light Sources :	COB LED ARRAY
Input Voltage :	220-240V AC / 50-60Hz
Trim :	AL. Die-Casting, Electrostatic Powder Coating
Optics :	PC Reflector
Reflector :	PC
Heat Sink :	AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature :	-20 to +40°C
Driver Lifetime :	50,000 Hours
Cuthole :	ø104mm; For ceiling thickness : 5-25mm

System Power	33.2W
LED Power	28.2W
Output Current	800mA
Output Voltage	35.2V DC
Color Consistency	3-SDCM
L.O.R.	0.8

CCT : 2700K ; CRI >90	3148 lm
CCT : 3000K ; CRI >90	3272 lm
CCT : 3500K ; CRI >90	3321 lm
CCT : 4000K ; CRI >90	3322 lm
CCT : 5000K ; CRI >80	3965 lm

Accessories

- HONEYCOMB
- CLEARLENS
- FROSTLENS



TADDEO 100 V2



- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warranty
- IP20 / IP44



- WHITE
- BLACK

- CE
- 15° / 30° / 60°
- Fixed angle
- ON/OFF, 1-10V, DALI


Specification	
Light Sources :	COB LED ARRAY
Input Voltage :	220-240V AC / 50-60Hz
Trim :	AL. Die-Casting, Electrostatic Powder Coating
Optics :	PC Reflector
Reflector :	PC
Heat Sink :	AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature :	-20 to +40°C
Driver Lifetime :	50,000 Hours
Cuthole :	ø104mm; For ceiling thickness : 5-25mm

System Power	33.2W
LED Power	28.2W
Output Current	800mA
Output Voltage	35.2V DC
Color Consistency	3-SDCM
L.O.R.	0.8

CCT : 2700K ; CRI >90	3148 lm
CCT : 3000K ; CRI >90	3272 lm
CCT : 3500K ; CRI >90	3321 lm
CCT : 4000K ; CRI >90	3322 lm
CCT : 5000K ; CRI >80	3965 lm

Accessories

- HONEYCOMB
- CLEARLENS
- FROSTLENS



TORRES M series

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warranty
- IP20



- WHITE
- BLACK



ON/OFF, TRIAC, 1-10V, DALI

Specification

Light Sources : COB LED ARRAY
Input Voltage : 220-240V AC / 50-60Hz
Trim : AL. Die-Casting, Electrostatic Powder Coating
Optics : Lens
Reflector : AL
Heat Sink : AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature : -20 to +40°C
Driver Lifetime : 50,000 Hours
Ceiling Thickness : 5-25mm

System Power 31.1W
LED Power 25.5W
Output Current 700mA
Output Voltage 36.3V DC
Color Consistency 3-SDCM
L.O.R 0.6

CCT : 2700K ; CRI >90 2375 lm
CCT : 3000K ; CRI >90 2526 lm
CCT : 3500K ; CRI >90 2586 lm
CCT : 4000K ; CRI >90 2646 lm

Accessories

- HONEYCOMB
- CLEARLENS
- FROSTLENS



NEW




TORRES M SQ

- 16° / 25° / 38° / 55°
- Rotation 355°
Adjustable +/- 30°

TORRES M SQ TRIMLESS

- 16° / 25° / 38° / 55°
- Rotation 355°
Adjustable +/- 30°

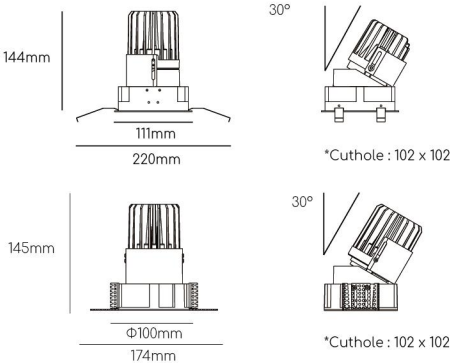


TORRES M

- 16° / 25° / 38° / 55°
- Rotation 355°
Adjustable +/- 30°

TORRES M W

- Wallwash
Optimal wallwashing distance: 1000mm*1000mm
- Rotation 360°

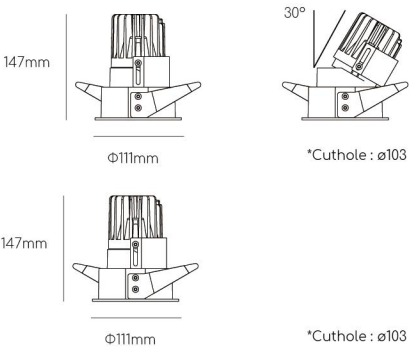


TORRES M TRIMLESS

- 16° / 25° / 38° / 55°
- Rotation 355°
Adjustable +/- 30°

TORRES M W TRIMLESS

- Wallwash
- Rotation 360°

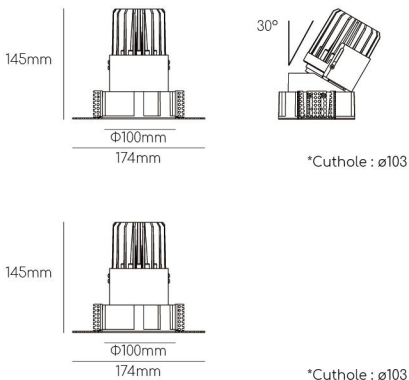

TORRES M TW series

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warranty
- IP20



- WHITE
- BLACK



Specification


Light Sources : COB LED ARRAY
Input Voltage : 220-240V AC / 50-60Hz
Trim : AL. Die-Casting, Electrostatic Powder Coating
Optics : PC Reflector
Reflector : PC
Heat Sink : AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature : -20 to +40°C
Driver Lifetime : 50,000 Hours
Ceiling Thickness : 5-25mm

System Power 28.8W
LED Power 24W
Output Current 600mA
Output Voltage 40V DC
Color Consistency 5-SDCM
L.O.R 0.6

CCT : 2700K ; CRI >90 2220 lm
CCT : 6500K ; CRI >90 2650 lm

Accessories

- HONEYCOMB
- CLEARLENS
- FROSTLENS


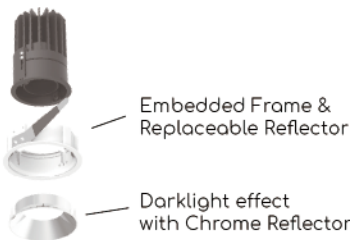


NEW





TORRES M SQ TW

- 16° / 25° / 38° / 55°
- Rotation 355° Adjustable +/- 30°





TORRES M SQ TRIMLESS TW

- 16° / 25° / 38° / 55°
- Rotation 355° Adjustable +/- 30°




TORRES M TW

- 16° / 25° / 38° / 55°
- Rotation 355° Adjustable +/- 30°





TORRES M W TW

- Wallwash
- Optimal wallwashing distance: 1000mm*1000mm
- Rotation 360°




TORRES M TRIMLESS TW

- 16° / 25° / 38° / 55°
- Rotation 355° Adjustable +/- 30°



TORRES M W TRIMLESS TW


- Wallwash
- Optimal wallwashing distance: 1000mm*1000mm
- Rotation 360°



TYCO series

TYCO 4

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warranty
- IP20 / IP44

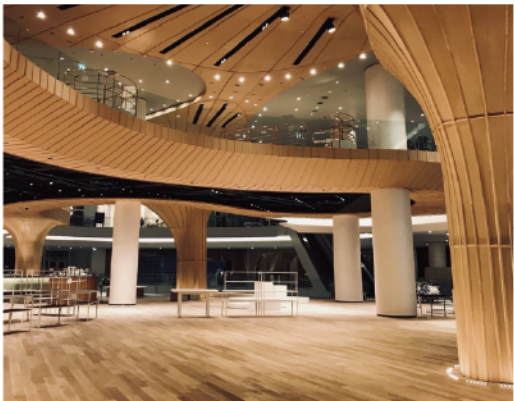

- WHITE
- BLACK



40° / 60°

Fixed angle


ON/OFF, TRIAC, 1-10V, DALI

Specification

Light Sources : COB LED ARRAY
Input Voltage : 220-240V AC / 50-60Hz
Trim : AL. Die-Casting, Electrostatic Powder Coating
Optics : AL Reflector
Reflector : AL
Heat Sink : AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature : -20 to +40°C
Driver Lifetime : 50,000 Hours
Cutthole : ø104mm; for ceiling thickness: 5-25mm

System Power 20.6W
LED Power 17.5W
Output Current 500mA
Output Voltage 35V DC
Color Consistency 3-SDCM
L.O.R 0.9

CCT : 2700K ; CRI >90 1921 lm
CCT : 3000K ; CRI >90 2000 lm
CCT : 3500K ; CRI >90 2027 lm
CCT : 4000K ; CRI >90 2031 lm
CCT : 5000K ; CRI >80 2421 lm



Accessories

- HONEYCOMB
- CLEARLENS
- FROSTLENS



TYCO 6

40° / 60°

Fixed angle

ON/OFF, 1-10V, DALI


Light Sources : COB LED ARRAY
Input Voltage : 220-240V AC / 50-60Hz
Trim : AL. Die-Casting, Electrostatic Powder Coating
Optics : AL Reflector
Reflector : AL
Heat Sink : AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature : -20 to +40°C
Driver Lifetime : 50,000 Hours
Cutthole : ø143mm; for ceiling thickness: 5-25mm

System Power 33.8W
LED Power 28.7W
Output Current 800mA
Output Voltage 36.3V DC
Color Consistency 3-SDCM
L.O.R 0.85

CCT : 2700K ; CRI >90 3148 lm
CCT : 3000K ; CRI >90 3272 lm
CCT : 3500K ; CRI >90 3321 lm
CCT : 4000K ; CRI >90 3322 lm
CCT : 5000K ; CRI >80 3965 lm

Accessories

- HONEYCOMB
- CLEARLENS
- FROSTLENS



TYCO 8

40° / 60°

Fixed angle

ON/OFF, 1-10V, DALI

Light Sources : COB LED ARRAY
Input Voltage : 220-240V AC / 50-60Hz
Trim : AL. Die-Casting, Electrostatic Powder Coating
Optics : AL Reflector
Reflector : AL
Heat Sink : AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature : -20 to +40°C
Driver Lifetime : 50,000 Hours
Cutthole : ø187mm; for ceiling thickness: 5-25mm

System Power 50.9W
LED Power 41.7W
Output Current 1200mA
Output Voltage 34.8V DC
Color Consistency 3-SDCM
L.O.R 0.8

CCT : 2700K ; CRI >90 4637 lm
CCT : 3000K ; CRI >90 4831 lm
CCT : 3500K ; CRI >90 4897 lm
CCT : 4000K ; CRI >90 4906 lm
CCT : 5000K ; CRI >80 5862 lm


Accessories

- HONEYCOMB
- CLEARLENS
- FROSTLENS

COB LED ARRAY
220-240V AC / 50-60Hz
AL. Die-Casting, Electrostatic Powder Coating
AL Reflector
AL
AL. Die-Casting, Electrostatic Powder Coating
-20 to +40°C
50,000 Hours
ø187mm; for ceiling thickness: 5-25mm

TYCO 8 50.9W
LED Power 41.7W
Output Current 1200mA
Output Voltage 34.8V DC
Color Consistency 3-SDCM
L.O.R 0.8

TYCO8 MAX 85W
78W
2100mA
37.2V DC
3-SDCM
0.8

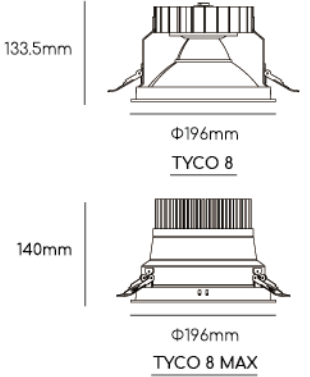

TYCO 6 TW


- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warranty
- IP20 / IP44



CE 40° / 60° Fixed angle ON/OFF, DALI

Specification
Light Sources : COB LED ARRAY
Input Voltage : 220-240V AC / 50-60Hz
Trim : AL. Die-Casting, Electrostatic Powder Coating
Optics : AL Reflector
Reflector : AL
Heat Sink : AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature : -20 to +40°C
Driver Lifetime : 50,000 Hours
Cuthole : ø143mm; For ceiling thickness : 5-25mm

System Power 30.6W
LED Power 26W
Output Current 700mA
Output Voltage 37V DC
Color Consistency 3-SDCM
L.O.R. 0.85
CCT : 2700K ; CRI >90 2234 lm
CCT : 6500K ; CRI >90 2646 lm



Accessories
HONEYCOMB CLEARLENS FROSTLENS

TYCO 8 TW


- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warranty
- IP20 / IP44



CE 40° / 60° Fixed angle ON/OFF, DALI

Specification
Light Sources : COB LED ARRAY
Input Voltage : 220-240V AC / 50-60Hz
Trim : AL. Die-Casting, Electrostatic Powder Coating
Optics : AL Reflector
Reflector : AL
Heat Sink : AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature : -20 to +40°C
Driver Lifetime : 50,000 Hours
Cuthole : ø183mm; For ceiling thickness : 5-25mm

System Power 30.6W
LED Power 26W
Output Current 700mA
Output Voltage 37V DC
Color Consistency 3-SDCM
L.O.R. 0.8
CCT : 2700K ; CRI >90 2234 lm
CCT : 6500K ; CRI >90 2646 lm



Accessories
HONEYCOMB CLEARLENS FROSTLENS

TADDEO III series

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warranty
- IP20



- WHITE
- BLACK



ON/OFF, TRIAC, 1-10V, DALI

Specification

Light Sources : COB LED ARRAY
Input Voltage : 220-240V AC / 50-60Hz
Trim : AL. Die-Casting, Electrostatic Powder Coating
Optics : Lens
Reflector : PC
Heat Sink : AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature : -20 to +40°C
Driver Lifetime : 50,000 Hours
Ceiling Thickness : 5-25mm

System Power 27.5W
LED Power 23.4W
Output Current 700mA
Output Voltage 34.7V DC
Color Consistency 3-SDCM
L.O.R 0.65

CCT : 2700K ; CRI >90 2797 lm
CCT : 3000K ; CRI >90 2907 lm
CCT : 3500K ; CRI >90 2950 lm
CCT : 4000K ; CRI >90 2952 lm
CCT : 5000K ; CRI >80 3523 lm


Accessories

- HONEYCOMB
- CLEARLENS
- FROSTLENS




TADDEO III

- 15° / 25° / 40°
- Fixed angle

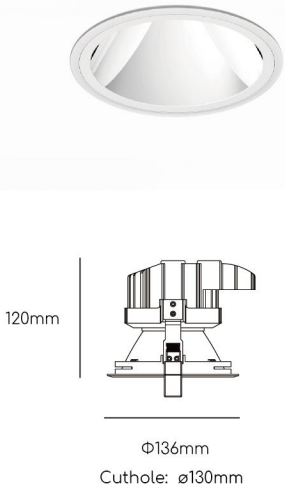


TADDEO III AJ

- 15° / 25° / 40°
- Adjustable +/- 15°

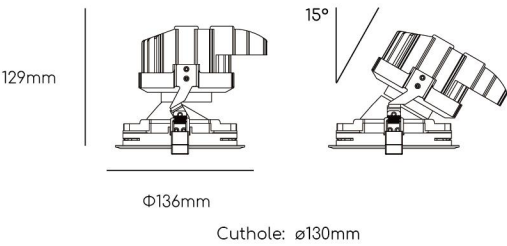

TADDEO III W

- Wallwash
- Rotation 360°



T-BOX SIN

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warrenty
- IP20



CE

15° / 25° / 40° / 60°

Rotation 355°
Adjustable +/- 40°

ON/OFF, TRIAC, 1-10V, DALI

RoHS COMPLIANT

Specification

Light Sources : COB LED ARRAY

Input Voltage : 220-240V AC / 50-60Hz

Trim : AL. Die-Casting, Electrostatic Powder Coating

Optics : Lens

Reflector : /

Heat Sink : AL. Die-Casting, Electrostatic Powder Coating

Operating Temperature : -20 to +40°C

Driver Lifetime : 50,000 Hours

Cuthole : 170mm*145mm; For ceiling thickness : 5-25mm

System Power 20W

LED Power 16.4W

Output Current 500mA

Output Voltage 32.8V DC

Color Consistency 3-SDCM

L.O.R. 0.8

CCT : 2700K ; CRI >90 2061 lm

CCT : 3000K ; CRI >90 2144 lm

CCT : 3500K ; CRI >90 2175 lm

CCT : 4000K ; CRI >90 2176 lm


CCT : 5000K ; CRI >80 2597 lm

Accessories

HONEYCOMB

CLEARLENS

FROSTLENS

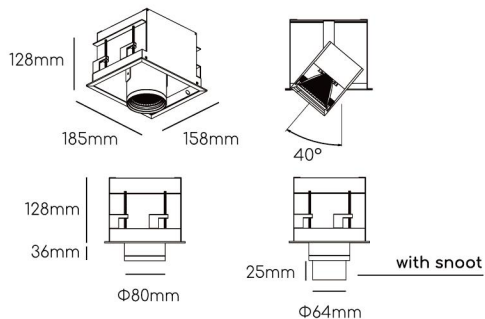

T-BOX DOU

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warrenty
- IP20



CE

15° / 25° / 40° / 60°

Rotation 355°
Adjustable +/- 40°

ON/OFF, TRIAC, 1-10V, DALI

RoHS COMPLIANT

Specification

Light Sources : COB LED ARRAY

Input Voltage : 220-240V AC / 50-60Hz

Trim : AL. Die-Casting, Electrostatic Powder Coating

Optics : Lens

Reflector : /

Heat Sink : AL. Die-Casting, Electrostatic Powder Coating

Operating Temperature : -20 to +40°C

Driver Lifetime : 50,000 Hours

Cuthole : 170mm*290mm; For ceiling thickness : 5-25mm

System Power 20W

LED Power 16.4W

Output Current 500mA

Output Voltage 32.8V DC

Color Consistency 3-SDCM

L.O.R. 0.8

CCT : 2700K ; CRI >90 2061 lm

CCT : 3000K ; CRI >90 2144 lm

CCT : 3500K ; CRI >90 2175 lm

CCT : 4000K ; CRI >90 2176 lm

CCT : 5000K ; CRI >80 2597 lm

DUAL

DUAL

DUAL

DUAL

DUAL


DUAL

Accessories

HONEYCOMB

CLEARLENS

FROSTLENS

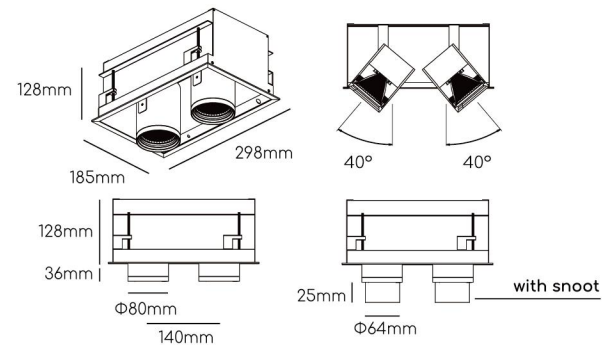

TETRIX

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warrenty
- IP20

COMING
SOON



15° / 25° / 40°



Rotation 355°
Adjustable +/- 15°



ON/OFF, TRIAC, 1-10V, DALI

Specification

Light Sources : COB LED ARRAY
Input Voltage : 220-240V AC / 50-60Hz
Trim : AL. Die-Casting, Electrostatic Powder Coating
Optics : Lens
Reflector : /
Heat Sink : AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature : -20 to +40°C
Driver Lifetime : 50,000 Hours
Cuthole : 90mm x 90mm; for ceiling thickness : 5-25mm

System Power 15.5W
LED Power 12.7W
Output Current 350mA
Output Voltage 36.3V DC
Color Consistency 3-SDCM

CCT : 2700K ; CRI >90 1103 lm
CCT : 3000K ; CRI >90 1173 lm
CCT : 3500K ; CRI >90 1201 lm
CCT : 4000K ; CRI >90 1229 lm

Accessories





HONEYCOMB





CLEARLENS



FROSTLENS



Customize any shape you like

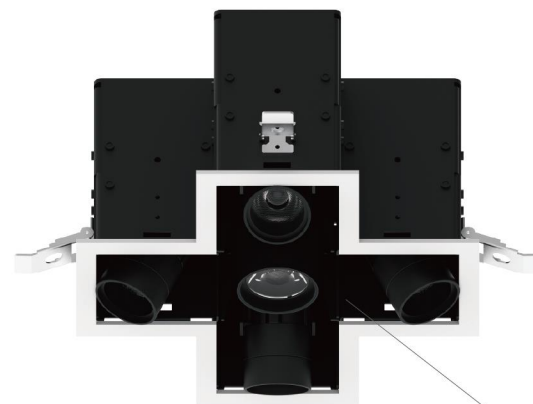

Compactable with different luminaire for track

TUBE series p.80 TASS series p.102
TRAC series p.90 TEDD series p.120

Explore the **X**th possibility
Creat your own unique TETRIX

TASS 20W R

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warranty
- IP20



- WHITE
- BLACK



15° / 25° / 40° / 60°

Rotation 355°
Adjustable +/- 90°

ON/OFF, TRIAC, 1-10V, DALI

Specification


Light Sources : COB LED ARRAY
Input Voltage : 220-240V AC / 50-60Hz
Trim : AL. Die-Casting, Electrostatic Powder Coating
Optics : Lens
Reflector : /
Heat Sink : AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature : -20 to +40°C
Driver Lifetime : 50,000 Hours
Cuthole : ø91mm; For ceiling thickness : 8-25mm

System Power 21.3W
LED Power 17.5W
Output Current 500mA
Output Voltage 35V DC
Color Consistency 3-SDCM
L.O.R. 0.9

CCT : 2700K ; CRI >90 1921 lm
CCT : 3000K ; CRI >90 2000 m
CCT : 3500K ; CRI >90 2027 lm
CCT : 4000K ; CRI >90 2031 lm
CCT : 5000K ; CRI >80 2421 lm

Accessories

- HONEYCOMB
- CLEARLENS
- FROSTLENS

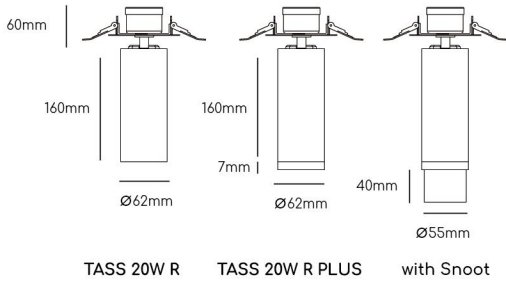


TASS 20W R

TASS 20W R PLUS

with Snoot



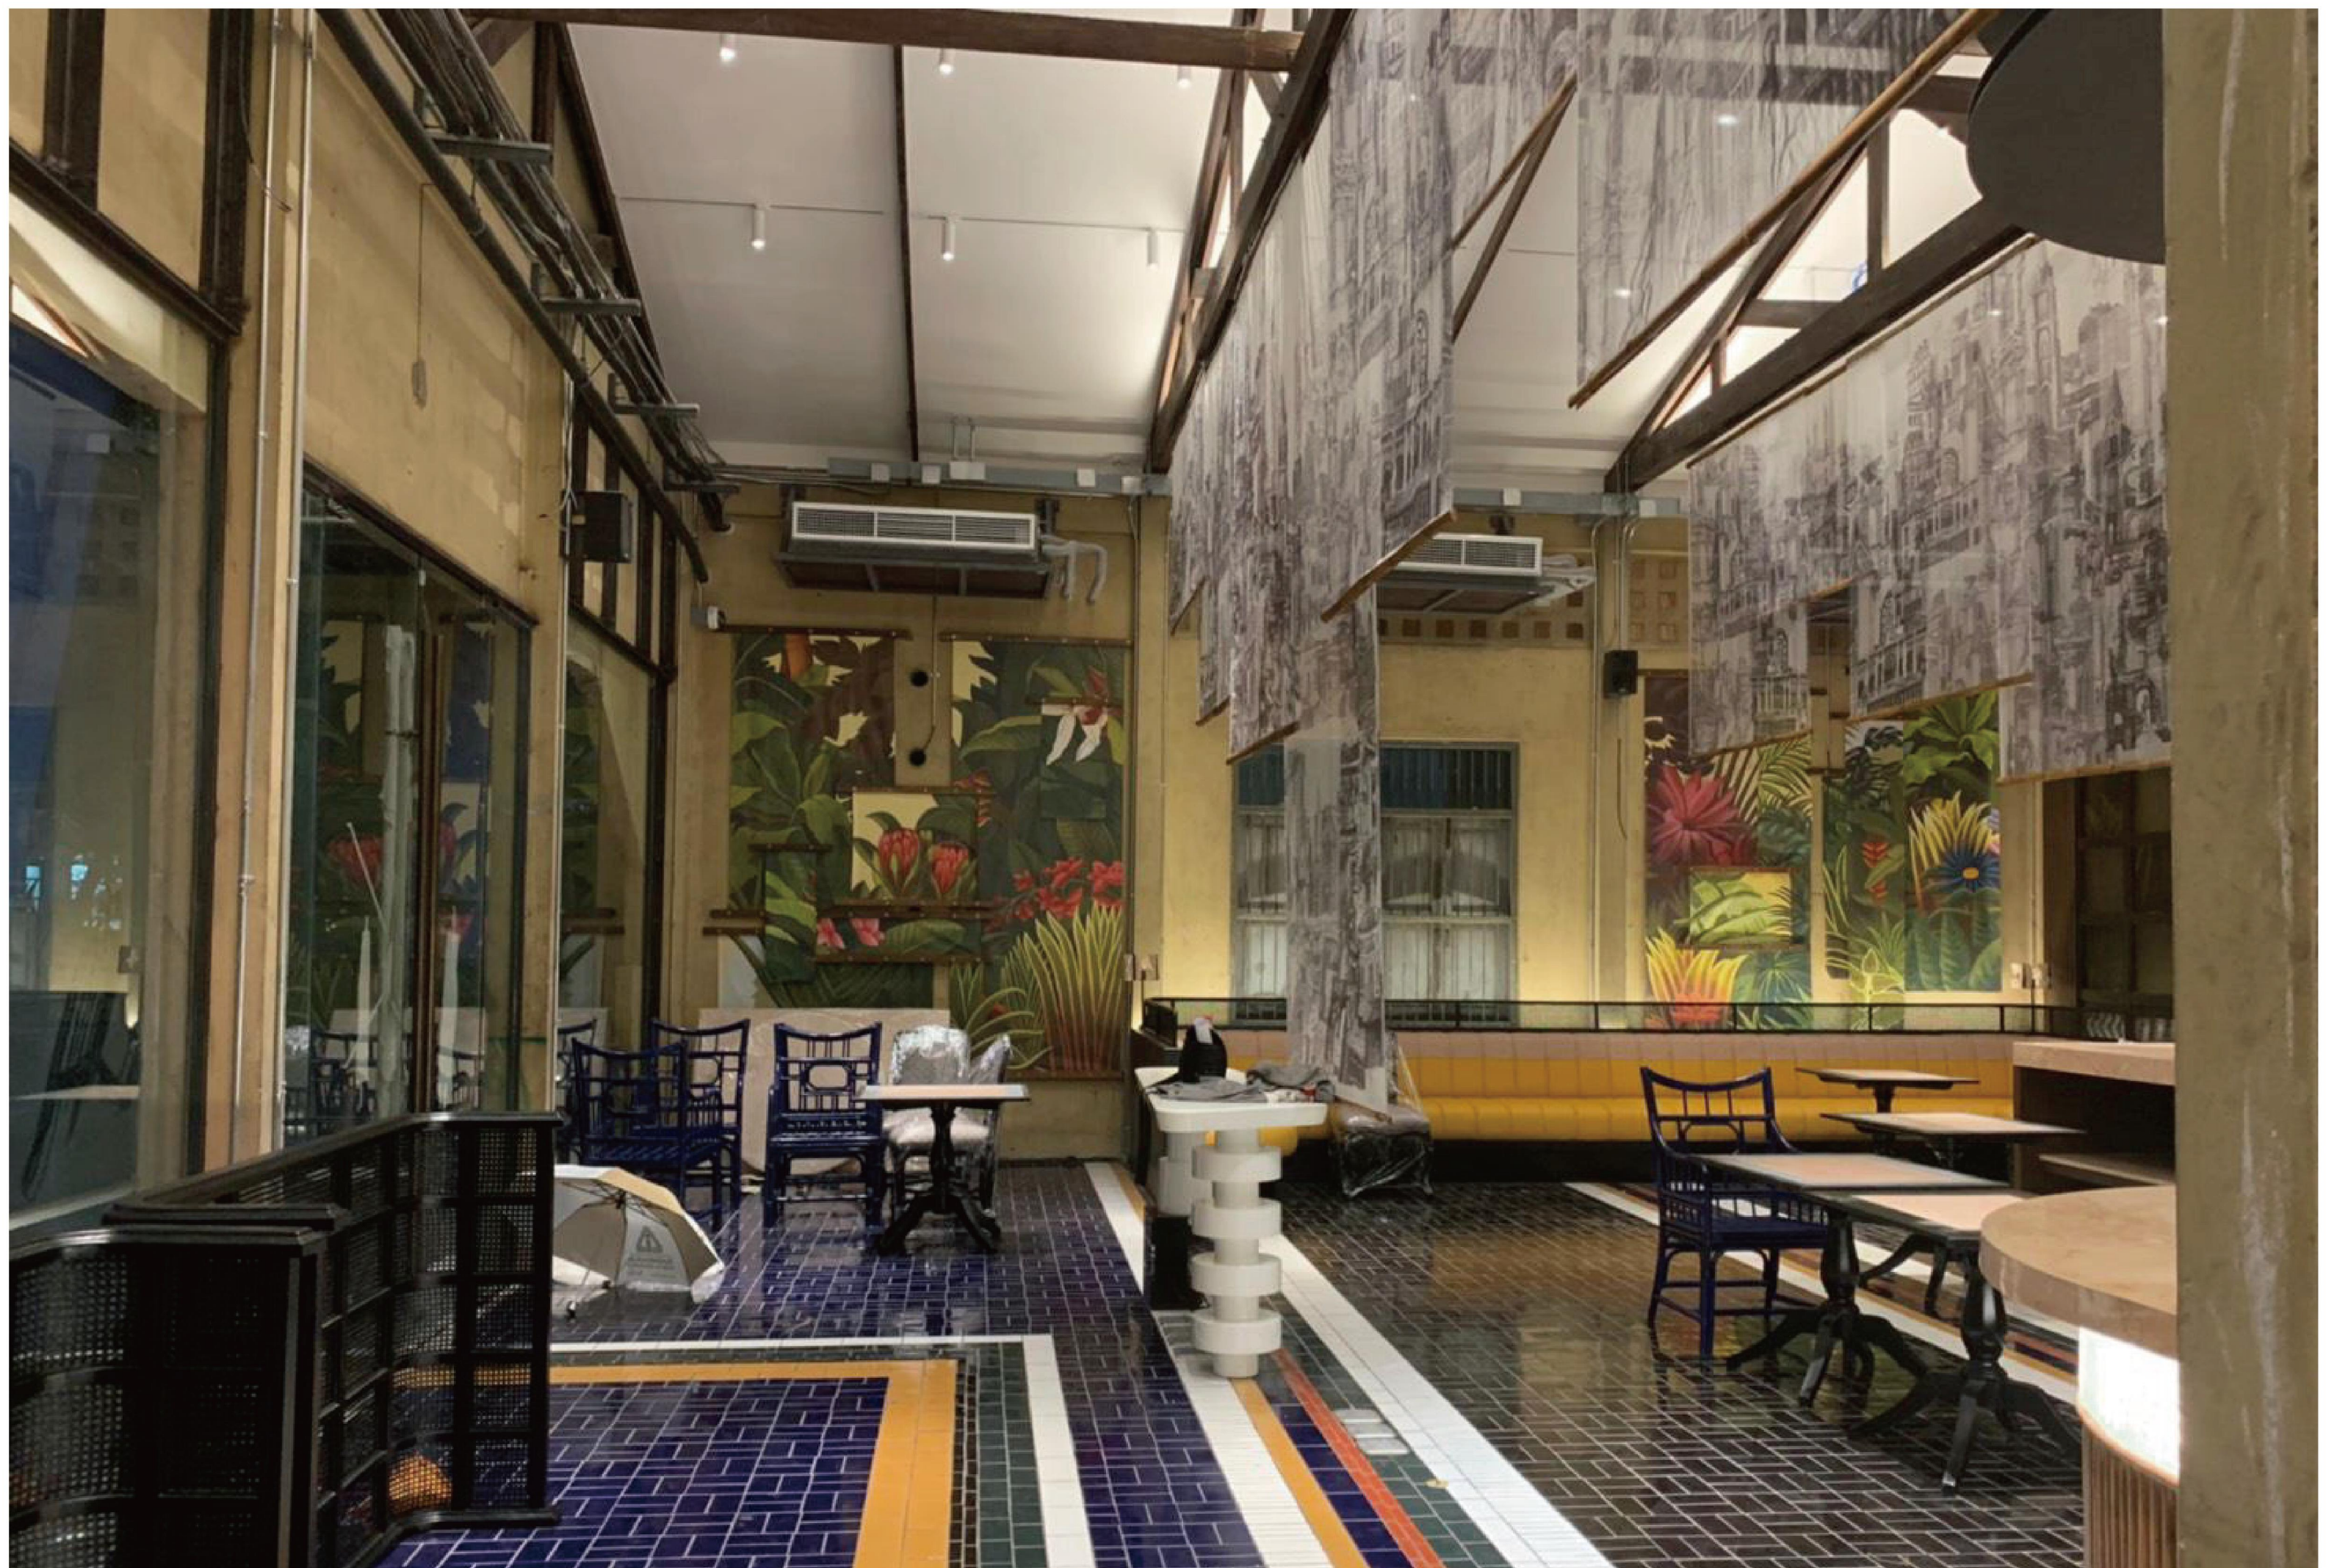



Tracklight



TUBE 10W H

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warrenty
- IP20



- CE
- 15° / 24° / 36°
- Rotation 355° Adjustable +/- 90°
- ON/OFF

Specification

Light Sources : COB LED ARRAY

Input Voltage : 220-240V AC / 50-60Hz

Trim : AL. Die-Casting, Electrostatic Powder Coating

Optics : Lens

Reflector : /

Heat Sink : AL. Die-Casting, Electrostatic Powder Coating

Operating Temperature : -20 to +40°C

Driver Lifetime : 50,000 Hours

Mounting Track : 3-Circuit (4-Wire)

System Power 10.7W

LED Power 8.8W

Output Current 250mA

Output Voltage 35.2V DC

Color Consistency 3-SDCM


L.O.R 0.8

CCT : 2700K ; CRI >90 822 lm

CCT : 3000K ; CRI >90 874 lm

CCT : 3500K ; CRI >90 894 lm

CCT : 4000K ; CRI >90 915 lm



- Accessories
- HONEYCOMB
 - CLEARLENS
 - FROSTLENS

TUBE 10W H2

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warrenty
- IP20



- CE
- 15° / 24° / 36°
- Rotation 355° Adjustable +/- 90°
- ON/OFF

Specification

Light Sources : COB LED ARRAY

Input Voltage : 220-240V AC / 50-60Hz

Trim : AL. Die-Casting, Electrostatic Powder Coating

Optics : Lens

Reflector : /

Heat Sink : AL. Die-Casting, Electrostatic Powder Coating

Operating Temperature : -20 to +40°C

Driver Lifetime : 50,000 Hours

Mounting Track : Single-Circuit (3-Wire)

System Power 10.7W

LED Power 8.8W

Output Current 250mA

Output Voltage 35.2V DC

Color Consistency 3-SDCM


L.O.R 0.8

CCT : 2700K ; CRI >90 822 lm

CCT : 3000K ; CRI >90 874 lm

CCT : 3500K ; CRI >90 894 lm

CCT : 4000K ; CRI >90 915 lm



- Accessories
- HONEYCOMB
 - CLEARLENS
 - FROSTLENS

TRAC AC

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 3 years warrenty
- IP20



- WHITE
- BLACK

- 15° / 25° / 40° / 60°
- Rotation 355° Adjustable +/- 90°
- ON/OFF, TRIAC


Specification	
Light Sources :	COB LED ARRAY
Input Voltage :	220-240V AC / 50-60Hz
Trim :	AL. Die-Casting, Electrostatic Powder Coating
Optics :	PC Reflector
Reflector :	PC
Heat Sink :	AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature :	-20 to +40°C
Driver Lifetime :	50,000 Hours
Mounting Track :	Single-Circuit (2-Wire) / 3-Circuit (4-Wire)

TRAC AC 10W	
System Power	10W
LED Power	/
Output Current	/
Output Voltage	/
Color Consistency	3-SDCM
L.O.R.	0.9

CCT : 2700K ; CRI >90	955 lm
CCT : 3000K ; CRI >90	980 lm
CCT : 4000K ; CRI >90	1015 lm
CCT : 5000K ; CRI >90	1015 lm

Accessories

- HONEYCOMB
- CLEARLENS
- FROSTLENS



TRAC SPOT

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warrenty
- IP20



- WHITE
- BLACK

- 8°
- Rotation 355° Adjustable +/- 90°
- ON/OFF


Specification	
Light Sources :	COB LED ARRAY
Input Voltage :	220-240V AC / 50-60Hz
Trim :	AL. Die-Casting, Electrostatic Powder Coating
Optics :	Lens
Reflector :	/
Heat Sink :	AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature :	-20 to +40°C
Driver Lifetime :	50,000 Hours
Mounting Track :	Single-Circuit (2-Wire) / 3-Circuit (4-Wire)

System Power	
LED Power	5W
Output Current	4W
Output Voltage	360mA
Output Voltage	11.3V DC
Color Consistency	3-SDCM

CCT : 2700K ; CRI >90	380 lm
CCT : 3000K ; CRI >90	410lm
CCT : 3500K ; CRI >90	410 lm
CCT : 4000K ; CRI >90	440 lm
CCT : 5000K ; CRI >90	440 lm


Accessories

- HONEYCOMB
- CLEARLENS
- FROSTLENS



TEJAS TRACKLIGHT

TRAC 15W



☐ WHITE
☒ BLACK




Specification

Light Sources :	COB LED ARRAY
Input Voltage :	220-240V AC / 50-60Hz
Trim :	AL. Die-Casting, Electrostatic Powder Coating
Optics :	Lens
Reflector :	/
Heat Sink :	AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature :	-20 to +40°C
Driver Lifetime :	50,000 Hours
Mounting Track :	Single-Circuit (2-Wire) / 3-Circuit (4-Wire)

System Power	14.9W
LED Power	12.2W
Output Current	360mA
Output Voltage	33.8V DC
Color Consistency	3-SDCM

CCT : 2700K ; CRI >90	1407 lm
CCT : 3000K ; CRI >90	1470 m
CCT : 3500K ; CRI >90	1508 lm
CCT : 4000K ; CRI >90	1514 lm
CCT : 5000K ; CRI >80	1860 lm

Accessories

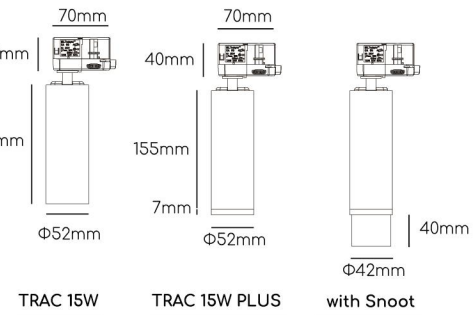

TRAC PLUS Extension kit for replaceable diffuser



TRAC 15W H/ H2

15° / 25° / 40° / 60°

Light Sources :
Input Voltage :
Trim :
Optics :
Reflector :
Heat Sink :
Operating Temperature :
Driver Lifetime :
Mounting Track (H) :
Mounting Track (H2) :


TRAC 15W H : ON/OFF, DALI
TRAC 15W H2 : ON/OFF
COB LED ARRAY
220-240V AC / 50-60Hz
AL. Die-Casting, Electrostatic Powder Coating
Lens
/
AL. Die-Casting, Electrostatic Powder Coating
-20 to +40°C
50,000 Hours
Single-Circuit (2-Wire) / 3-Circuit (4-Wire) / 3-Circuit (6-Wire)*DALI
Single-Circuit (3-Wire)

System Power
LED Power
Output Current
Output Voltage
Color Consistency
L.O.R

14.4W
11.8W
350mA
33.7V DC
3-SDCM
0.9

CCT : 2700K ; CRI >90
CCT : 3000K ; CRI >90
CCT : 3500K ; CRI >90
CCT : 4000K ; CRI >90
CCT : 5000K ; CRI >90

1393 lm
1450 lm
1470 lm
1473 lm
1756 lm

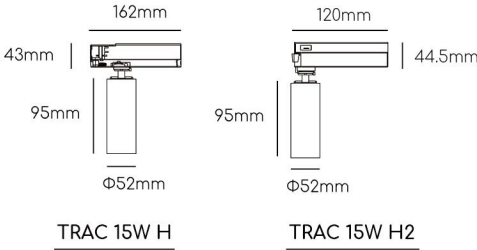

TRAC 25W H/ H2

15° / 25° / 40° / 60°

Light Sources :
Input Voltage :
Trim :
Optics :
Reflector :
Heat Sink :
Operating Temperature :
Driver Lifetime :
Mounting Track (H) :
Mounting Track (H2) :


TRAC 25W H : ON/OFF, DALI
TRAC 25W H2 : ON/OFF
COB LED ARRAY
220-240V AC / 50-60Hz
AL. Die-Casting, Electrostatic Powder Coating
Lens
/
AL. Die-Casting, Electrostatic Powder Coating
-20 to +40°C
50,000 Hours
Single-Circuit (2-Wire) / 3-Circuit (4-Wire) / 3-Circuit (6-Wire)*DALI
Single-Circuit (3-Wire)

System Power
LED Power
Output Current
Output Voltage
Color Consistency
L.O.R

26.1W
21.4W
600mA
35.7V DC
3-SDCM
0.9

CCT : 2700K ; CRI >90
CCT : 3000K ; CRI >90
CCT : 3500K ; CRI >90
CCT : 4000K ; CRI >90
CCT : 5000K ; CRI >90

2254 lm
2346 lm
2378 lm
2383 lm
2840 lm

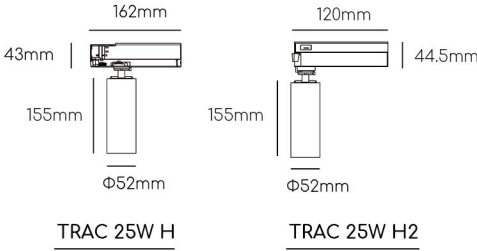

TRAC 15W D

15° / 25° / 40° / 60°

Light Sources :
Input Voltage :
Trim :
Optics :
Reflector :
Heat Sink :
Operating Temperature :
Driver Lifetime :
Mounting Track :


ON/OFF, TRIAC, 1-10V, DALI
COB LED ARRAY
220-240V AC / 50-60Hz
AL. Die-Casting, Electrostatic Powder Coating
Lens
/
AL. Die-Casting, Electrostatic Powder Coating
-20 to +40°C
50,000 Hours
3-Circuit (4-Wire)

System Power
LED Power
Output Current
Output Voltage
Color Consistency
L.O.R

14.4W
11.8W
350mA
33.7V DC
3-SDCM
0.9

CCT : 2700K ; CRI >90
CCT : 3000K ; CRI >90
CCT : 3500K ; CRI >90
CCT : 4000K ; CRI >90
CCT : 5000K ; CRI >90

1393 lm
1450 lm
1470 lm
1473 lm
1756 lm



TRAC 25W D

15° / 25° / 40° / 60°

Light Sources :
Input Voltage :
Trim :
Optics :
Reflector :
Heat Sink :
Operating Temperature :
Driver Lifetime :
Mounting Track :


ON/OFF, 1-10V, DALI
COB LED ARRAY
220-240V AC / 50-60Hz
AL. Die-Casting, Electrostatic Powder Coating
Lens
/
AL. Die-Casting, Electrostatic Powder Coating
-20 to +40°C
50,000 Hours
3-Circuit (4-Wire)

System Power
LED Power
Output Current
Output Voltage
Color Consistency
L.O.R

26.1W
21.4W
600mA
35.7V DC
3-SDCM
0.9


CCT : 2700K ; CRI >90
CCT : 3000K ; CRI >90
CCT : 3500K ; CRI >90
CCT : 4000K ; CRI >90
CCT : 5000K ; CRI >90

2254 lm
2346 lm
2378 lm
2383 lm
2840 lm



TASS AC

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 3 years warrenty
- IP20

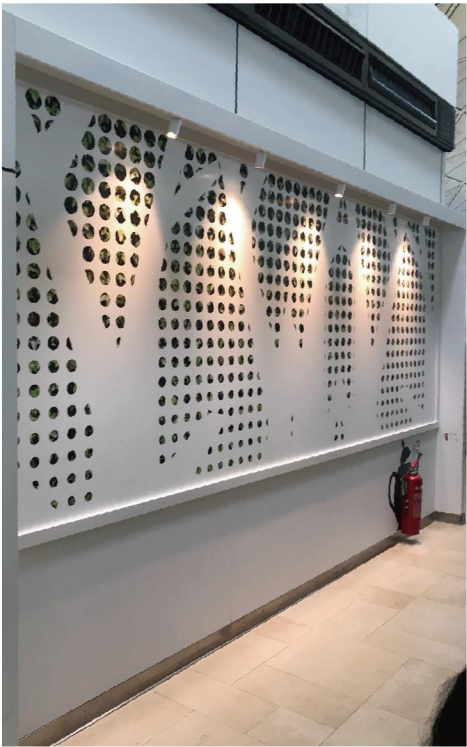

- WHITE
- BLACK

CE

15° / 25° / 40° / 60°

Rotation 355°
Adjustable +/- 90°

ON/OFF, TRIAC

Specification	
Light Sources :	COB LED ARRAY
Input Voltage :	220-240V AC / 50-60Hz
Trim :	AL. Die-Casting, Electrostatic Powder Coating
Optics :	PC Reflector
Reflector :	PC
Heat Sink :	AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature :	-20 to +40°C
Driver Lifetime :	50,000 Hours
Mounting Track :	Single-Circuit (2-Wire) / 3-Circuit (4-Wire)


System Power	14W
LED Power	/
Output Current	/
Output Voltage	/
Color Consistency	3-SDCM
L.O.R.	0.9
CCT : 2700K ; CRI >90	1245 lm
CCT : 3000K ; CRI >90	1280 lm
CCT : 4000K ; CRI >90	1330 lm
CCT : 5000K ; CRI >90	1330 lm

Accessories

HONEYCOMB

CLEARLENS

FROSTLENS



TASS SPOT

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warrenty
- IP20



- WHITE
- BLACK

CE

8°

Rotation 355°
Adjustable +/- 90°

ON/OFF, TRIAC

Specification	
Light Sources :	COB LED ARRAY
Input Voltage :	220-240V AC / 50-60Hz
Trim :	AL. Die-Casting, Electrostatic Powder Coating
Optics :	Lens
Reflector :	/
Heat Sink :	AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature :	-20 to +40°C
Driver Lifetime :	50,000 Hours
Mounting Track :	Single-Circuit (2-Wire) / 3-Circuit (4-Wire)


System Power	10W
LED Power	8.2W
Output Current	700mA
Output Voltage	11.8V DC
Color Consistency	3-SDCM
CCT : 2700K ; CRI >90	684 lm
CCT : 3000K ; CRI >90	738 lm
CCT : 3500K ; CRI >90	738 lm
CCT : 4000K ; CRI >90	738 lm
CCT : 5000K ; CRI >90	792 lm

Accessories

HONEYCOMB

CLEARLENS

FROSTLENS



TASS 20W

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warrenty
- IP20



- WHITE
- BLACK

- CE
- 15° / 25° / 40° / 60°
- Rotation 355° Adjustable +/- 90°
- ON/OFF, TRIAC, 1-10V, DALI



Specification


Light Sources : COB LED ARRAY
Input Voltage : 220-240V AC / 50-60Hz
Trim : AL. Die-Casting, Electrostatic Powder Coating
Optics : Lens
Reflector : /
Heat Sink : AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature : -20 to +40°C
Driver Lifetime : 50,000 Hours
Mounting Track : Single-Circuit (2-Wire) / 3-Circuit (4-Wire) / 3-Circuit (6-Wire) *DALI

System Power 21.3W
LED Power 17.5W
Output Current 500mA
Output Voltage 35V DC
Color Consistency 3-SDCM
L.O.R. 0.9

CCT : 2700K ; CRI >90 1921 lm
CCT : 3000K ; CRI >90 2000 m
CCT : 3500K ; CRI >90 2027 lm
CCT : 4000K ; CRI >90 2031 lm
CCT : 5000K ; CRI >80 2421 lm

Accessories

- HONEYCOMB
- CLEARLENS
- FROSTLENS
- SNOOT

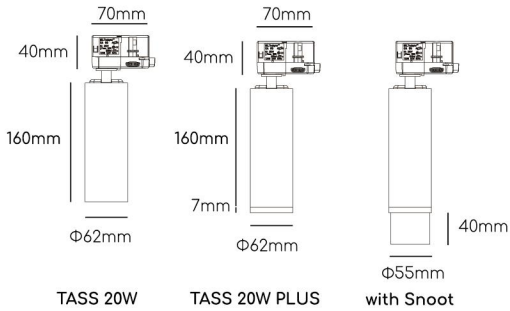

TASS 20W TASS 20W PLUS TASS 20W PLUS with Snoot

TASS 25W D TW

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warrenty
- IP20



- WHITE
- BLACK

- CE
- 25° / 40° / 50°
- Rotation 355° Adjustable +/- 90°
- DALI



Specification


Light Sources : COB LED ARRAY
Input Voltage : 220-240V AC / 50-60Hz
Trim : AL. Die-Casting, Electrostatic Powder Coating
Optics : PC Reflector
Reflector : PC
Heat Sink : AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature : -20 to +40°C
Driver Lifetime : 50,000 Hours
Mounting Track : 3-Circuit (4-Wire)

System Power 26.6W
LED Power 22.2W
Output Current 600mA
Output Voltage 37V DC
Color Consistency 3-SDCM
L.O.R. 0.9

CCT : 2700K ; CRI >90 2059 lm
CCT : 6500K ; CRI >90 2350 m

Accessories

- HONEYCOMB
- CLEARLENS
- FROSTLENS
- SNOOT

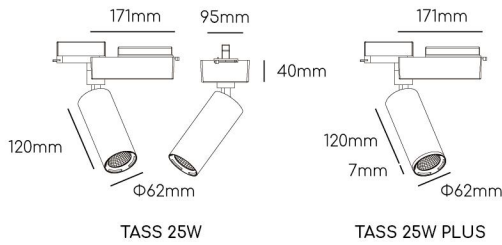

TASS 25W TASS 25W PLUS

TASS 17W H/ H2

15° / 25° / 40° / 60°

Light Sources :
Input Voltage :
Trim :
Optics :
Reflector :
Heat Sink :
Operating Temperature :
Driver Lifetime :
Mounting Track (H) :
Mounting Track (H2) :


TASS 17W H : ON/OFF, DALI
TASS 17W H2 : ON/OFF
COB LED ARRAY
220-240V AC / 50-60Hz
AL. Die-Casting, Electrostatic Powder Coating
Lens
/
AL. Die-Casting, Electrostatic Powder Coating
-20 to +40°C
50,000 Hours
Single-Circuit (2-Wire) / 3-Circuit (4-Wire) / 3-Circuit (6-Wire)*DALI
Single-Circuit (3-Wire)

System Power
LED Power
Output Current
Output Voltage
Color Consistency
L.O.R.

19W
15.6W
450mA
35.9V DC
3-SDCM
0.9

CCT : 2700K
CCT : 3000K
CCT : 3500K
CCT : 4000K
CCT : 5000K

1749 lm CRI >90
1821 lm CRI >90
1846 lm CRI >90
1849 m CRI >90
2204 lm CRI >80

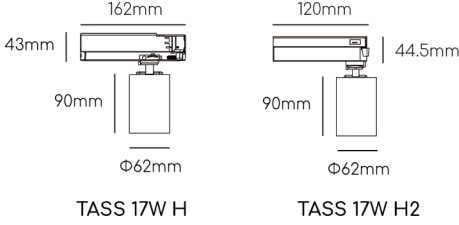

TASS 25W H/ H2

15° / 25° / 40° / 60°

Light Sources :
Input Voltage :
Trim :
Optics :
Reflector :
Heat Sink :
Operating Temperature :
Driver Lifetime :
Mounting Track (H) :
Mounting Track (H2) :


TASS 25W H : ON/OFF, DALI
TASS 25W H2 : ON/OFF
COB LED ARRAY
220-240V AC / 50-60Hz
AL. Die-Casting, Electrostatic Powder Coating
Lens
/
AL. Die-Casting, Electrostatic Powder Coating
-20 to +40°C
50,000 Hours
Single-Circuit (2-Wire) / 3-Circuit (4-Wire) / 3-Circuit (6-Wire)*DALI
Single-Circuit (3-Wire)

System Power
LED Power
Output Current
Output Voltage
Color Consistency
L.O.R.

31.1W
25.5W
700mA
36.4V DC
3-SDCM
0.9

CCT : 2700K
CCT : 3000K
CCT : 3500K
CCT : 4000K
CCT : 5000K

2572 lm CRI >90
2678 lm CRI >90
2714 lm CRI >90
2720 lm CRI >90
3242 lm CRI >80

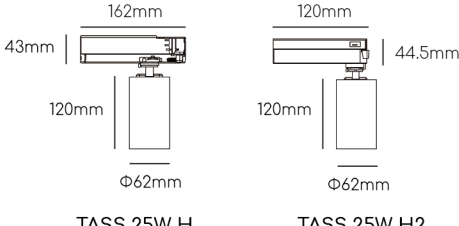

TASS 32W H/ H2

15° / 25° / 40° / 50°

Light Sources :
Input Voltage :
Trim :
Optics :
Reflector :
Heat Sink :
Operating Temperature :
Driver Lifetime :
Mounting Track (H) :
Mounting Track (H2) :


ON/OFF
COB LED ARRAY
220-240V AC / 50-60Hz
AL. Die-Casting, Electrostatic Powder Coating
PC Reflector
PC
AL. Die-Casting, Electrostatic Powder Coating
-20 to +40°C
50,000 Hours
Single-Circuit (2-Wire) / 3-Circuit (4-Wire) / 3-Circuit (6-Wire)*DALI
Single-Circuit (3-Wire)

System Power
LED Power
Output Current
Output Voltage
Color Consistency
L.O.R.

34.4W
28.2W
800mA
35.2V DC
3-SDCM
0.9

CCT : 2700K
CCT : 3000K
CCT : 3500K
CCT : 4000K
CCT : 5000K

3148 lm CRI >90
3272 lm CRI >90
321 lm CRI >90
3322 lm CRI >90
3965 lm CRI >80

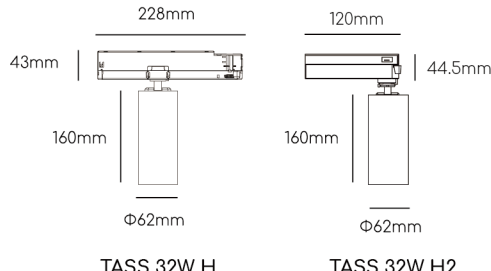

TASS 17W D

15° / 25° / 40° / 60°

Light Sources :
Input Voltage :
Trim :
Optics :
Reflector :
Heat Sink :
Operating Temperature :
Driver Lifetime :
Mounting Track :


ON/OFF, TRIAC, 1-10V, DALI, CASAMBI
COB LED ARRAY
220-240V AC / 50-60Hz
AL. Die-Casting, Electrostatic Powder Coating
Lens
/
AL. Die-Casting, Electrostatic Powder Coating
-20 to +40°C
50,000 Hours
3-Circuit (4-Wire)

System Power
LED Power
Output Current
Output Voltage
Color Consistency
L.O.R.

19W
15.6W
450mA
35.9V DC
3-SDCM
0.9

CCT : 2700K
CCT : 3000K
CCT : 3500K
CCT : 4000K
CCT : 5000K

1749 lm CRI >90
1821 lm CRI >90
1846 lm CRI >90
1849 m CRI >90
2204 lm CRI >80



TASS 25W D

15° / 25° / 40° / 60°

Light Sources :
Input Voltage :
Trim :
Optics :
Reflector :
Heat Sink :
Operating Temperature :
Driver Lifetime :
Mounting Track :


ON/OFF, 1-10V, DALI, CASAMBI
COB LED ARRAY
220-240V AC / 50-60Hz
AL. Die-Casting, Electrostatic Powder Coating
Lens
/
AL. Die-Casting, Electrostatic Powder Coating
-20 to +40°C
50,000 Hours
3-Circuit (4-Wire) / 3-Circuit (6-Wire)*DALI

System Power
LED Power
Output Current
Output Voltage
Color Consistency
L.O.R.

31.1W
25.5W
700mA
36.4V DC
3-SDCM
0.9

CCT : 2700K
CCT : 3000K
CCT : 3500K
CCT : 4000K
CCT : 5000K

2572 lm CRI >90
2678 lm CRI >90
2714 lm CRI >90
2720 lm CRI >90
3242 lm CRI >80



TASS 32W D

15° / 25° / 40° / 50°

Light Sources :
Input Voltage :
Trim :
Optics :
Reflector :
Heat Sink :
Operating Temperature :
Driver Lifetime :
Mounting Track :


ON/OFF, 1-10V, DALI, CASAMBI
COB LED ARRAY
220-240V AC / 50-60Hz
AL. Die-Casting, Electrostatic Powder Coating
PC Reflector
PC
AL. Die-Casting, Electrostatic Powder Coating
-20 to +40°C
50,000 Hours
3-Circuit (4-Wire) / 3-Circuit (6-Wire)*DALI

System Power
LED Power
Output Current
Output Voltage
Color Consistency
L.O.R.

34.4W
28.2W
800mA
35.2V DC
3-SDCM
0.9

CCT : 2700K
CCT : 3000K
CCT : 3500K
CCT : 4000K
CCT : 5000K

3148 lm CRI >90
3272 lm CRI >90
321 lm CRI >90
3322 lm CRI >90
3965 lm CRI >80



TASS 20W Z

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warrenty
- IP20



- WHITE
- BLACK



- 15° / 25° / 40° / 60°
- Rotation 355° Adjustable +/- 90°
- ON/OFF, TRIAC, 1-10V, DALI

Specification


Light Sources : COB LED ARRAY
Input Voltage : 220-240V AC / 50-60Hz
Trim : AL. Die-Casting, Electrostatic Powder Coating
Optics : Lens
Reflector : /
Heat Sink : AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature : -20 to +40°C
Driver Lifetime : 50,000 Hours
Mounting Track : Single-Circuit (2-Wire) / 3-Circuit (4-Wire) / 3-Circuit (6-Wire) *DALI

System Power 19.8W
LED Power 16.8W
Output Current 450mA
Output Voltage 37.4V DC
Color Consistency 3-SDCM

CCT : 2700K ; CRI >90 1367 lm
CCT : 3000K ; CRI >90 1453 lm
CCT : 3500K ; CRI >90 1488 lm
CCT : 4000K ; CRI >90 1522 lm

Accessories

- HONEYCOMB
- CLEARLENS
- FROSTLENS

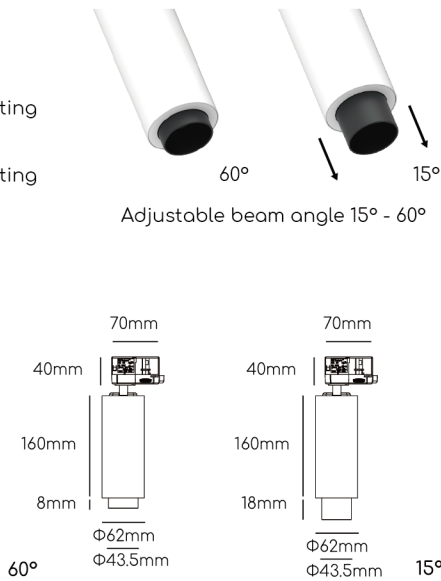

TASS 20W ZZD

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warrenty
- IP20



Preliminary

- WHITE
- BLACK





- 15° - 60°
- Rotation 355° Adjustable +/- 90°
- CASAMBI

Specification

Light Sources : COB LED ARRAY
Input Voltage : 220-240V AC / 50-60Hz
Trim : AL. Die-Casting, Electrostatic Powder Coating
Optics : Lens
Reflector : /
Heat Sink : AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature : -20 to +40°C
Driver Lifetime : 50,000 Hours
Mounting Track : 3-Circuit (6-Wire)

System Power 20.6W
LED Power 17.5W
Output Current 500mA
Output Voltage 35V DC
Color Consistency 3-SDCM

CCT : 2700K ; CRI >90 1921 lm
CCT : 3000K ; CRI >90 2000 lm
CCT : 3500K ; CRI >90 2027 lm
CCT : 4000K ; CRI >90 2031 lm
CCT : 5000K ; CRI >80 2421 lm

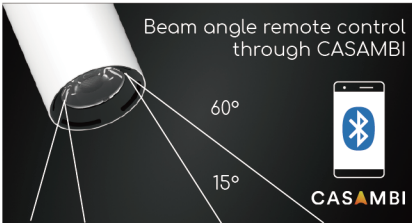

TEDD series

TEDD 30W

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warranty
- IP20



WHITE
BLACK



15° / 25° / 40° / 60°

Rotation 355°
Adjustable +/- 90°

ON/OFF, 1-10V, DALI

Specification

Light Sources : COB LED ARRAY
Input Voltage : 220-240V AC / 50-60Hz
Trim : AL. Die-Casting, Electrostatic Powder Coating
Optics : Lens
Reflector : /
Heat Sink : AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature : -20 to +40°C
Driver Lifetime : 50,000 Hours
Mounting Track : Single-Circuit (2-Wire) / 3-Circuit (4-Wire) / 3-Circuit (6-Wire)*DALI

System Power 30W
LED Power 25.4W
Output Current 750mA
Output Voltage 33.9V DC
Color Consistency 3-SDCM
L.O.R. 0.8

CCT : 2700K ; CRI >90 3000 lm
CCT : 3000K ; CRI >90 3119 lm
CCT : 3500K ; CRI >90 3164 lm
CCT : 4000K ; CRI >90 3166 m
CCT : 5000K ; CRI >80 3778 lm

Accessories



HONEYCOMB




CLEARLENS



FROSTLENS



SNOOT

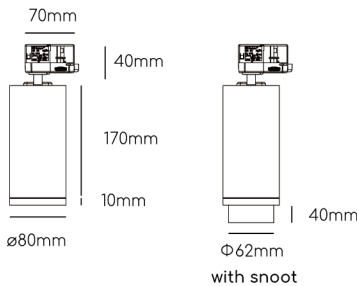

TEDD 25/35W H

15° / 25° / 40° / 60°


Rotation 355°
Adjustable +/- 90°

ON/OFF, 1-10V, DALI

Light Sources : COB LED ARRAY
Input Voltage : 220-240V AC / 50-60Hz
Trim : AL. Die-Casting, Electrostatic Powder Coating
Optics : Lens
Reflector : /
Heat Sink : AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature : -20 to +40°C
Driver Lifetime : 50,000 Hours
Mounting Track : 3-Circuit (4-Wire)

System Power 35.6W
LED Power 29.2W
Output Current 850mA
Output Voltage 34.3V DC
Color Consistency 3-SDCM
L.O.R. 0.8

CCT : 2700K ; CRI >90 3359 lm
CCT : 3000K ; CRI >90 3493 lm
CCT : 3500K ; CRI >90 3544 lm
CCT : 4000K ; CRI >90 3546 m
CCT : 5000K ; CRI >80 4231 lm



TEDD 40W D

15° / 25° / 40° / 60°


Rotation 355°
Adjustable +/- 90°

ON/OFF, 1-10V, DALI

Light Sources : COB LED ARRAY
Input Voltage : 220-240V AC / 50-60Hz
Trim : AL. Die-Casting, Electrostatic Powder Coating
Optics : Lens
Reflector : /
Heat Sink : AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature : -20 to +40°C
Driver Lifetime : 50,000 Hours
Mounting Track : Single-Circuit (2-Wire) / 3-Circuit (4-Wire)

System Power 45W
LED Power 36.9W
Output Current 1050mA
Output Voltage 35.1V DC
Color Consistency 3-SDCM
L.O.R. 0.8

CCT : 2700K ; CRI >90 4054 lm
CCT : 3000K ; CRI >90 4216 lm
CCT : 3500K ; CRI >90 4277 lm
CCT : 4000K ; CRI >90 4280 m
CCT : 5000K ; CRI >80 5107 lm



TREY

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warrenty
- IP20



CE

15° / 30° / 60°

Rotation 355°
Adjustable +/- 90°

ON/OFF, 1-10V, DALI

RoHS COMPLIANT

Specification

Light Sources :
Input Voltage :
Trim :
Optics :
Reflector :
Heat Sink :
Operating Temperature :
Driver Lifetime :
Mounting Track :

COB LED ARRAY
220-240V AC / 50-60Hz
AL. Die-Casting, Electrostatic Powder Coating
PC Reflector
PC
AL. Die-Casting, Electrostatic Powder Coating
-20 to +40°C
50,000 Hours
Single-Circuit (2-Wire) / 3-Circuit (4-Wire) / 3-Circuit (6-Wire)


	TREY 25W	TREY 30W
System Power	28.6W	33.1W
LED Power	24.3W	28.2W
Output Current	700mA	800mA
Output Voltage	33.7V DC	36.4V DC
Color Consistency	3-SDCM	3-SDCM
L.O.R.	0.8	0.8
CCT : 2700K	2797 lm	3148 lm
CCT : 3000K	2907 lm	3272 lm
CCT : 3500K	2950 lm	3321 lm
CCT : 4000K	2952 lm	3322 lm
CCT : 5000K	3523 lm	3965 lm
	CRI >90	CRI >90
	CRI >90	CRI >90
	CRI >90	CRI >90
	CRI >90	CRI >90
	CRI >80	CRI >80

Accessories

HONEYCOMB


CLEARLENS

FROSTLENS



TREY TW

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warrenty
- IP20



CE

30° / 60°

Rotation 355°
Adjustable +/- 90°

DALI

RoHS COMPLIANT

Specification

Light Sources :
Input Voltage :
Trim :
Optics :
Reflector :
Heat Sink :
Operating Temperature :
Driver Lifetime :
Mounting Track :

COB LED ARRAY
220-240V AC / 50-60Hz
AL. Die-Casting, Electrostatic Powder Coating
PC Reflector
PC
AL. Die-Casting, Electrostatic Powder Coating
-20 to +40°C
50,000 Hours
3-Circuit (4-Wire)


System Power	31.8W
LED Power	26W
Output Current	700mA
Output Voltage	37V DC
Color Consistency	3-SDCM
L.O.R.	0.75
CCT : 2700K ; CRI >90	2234 lm
CCT : 6500K ; CRI >90	2646 m


Accessories

HONEYCOMB

CLEARLENS

FROSTLENS



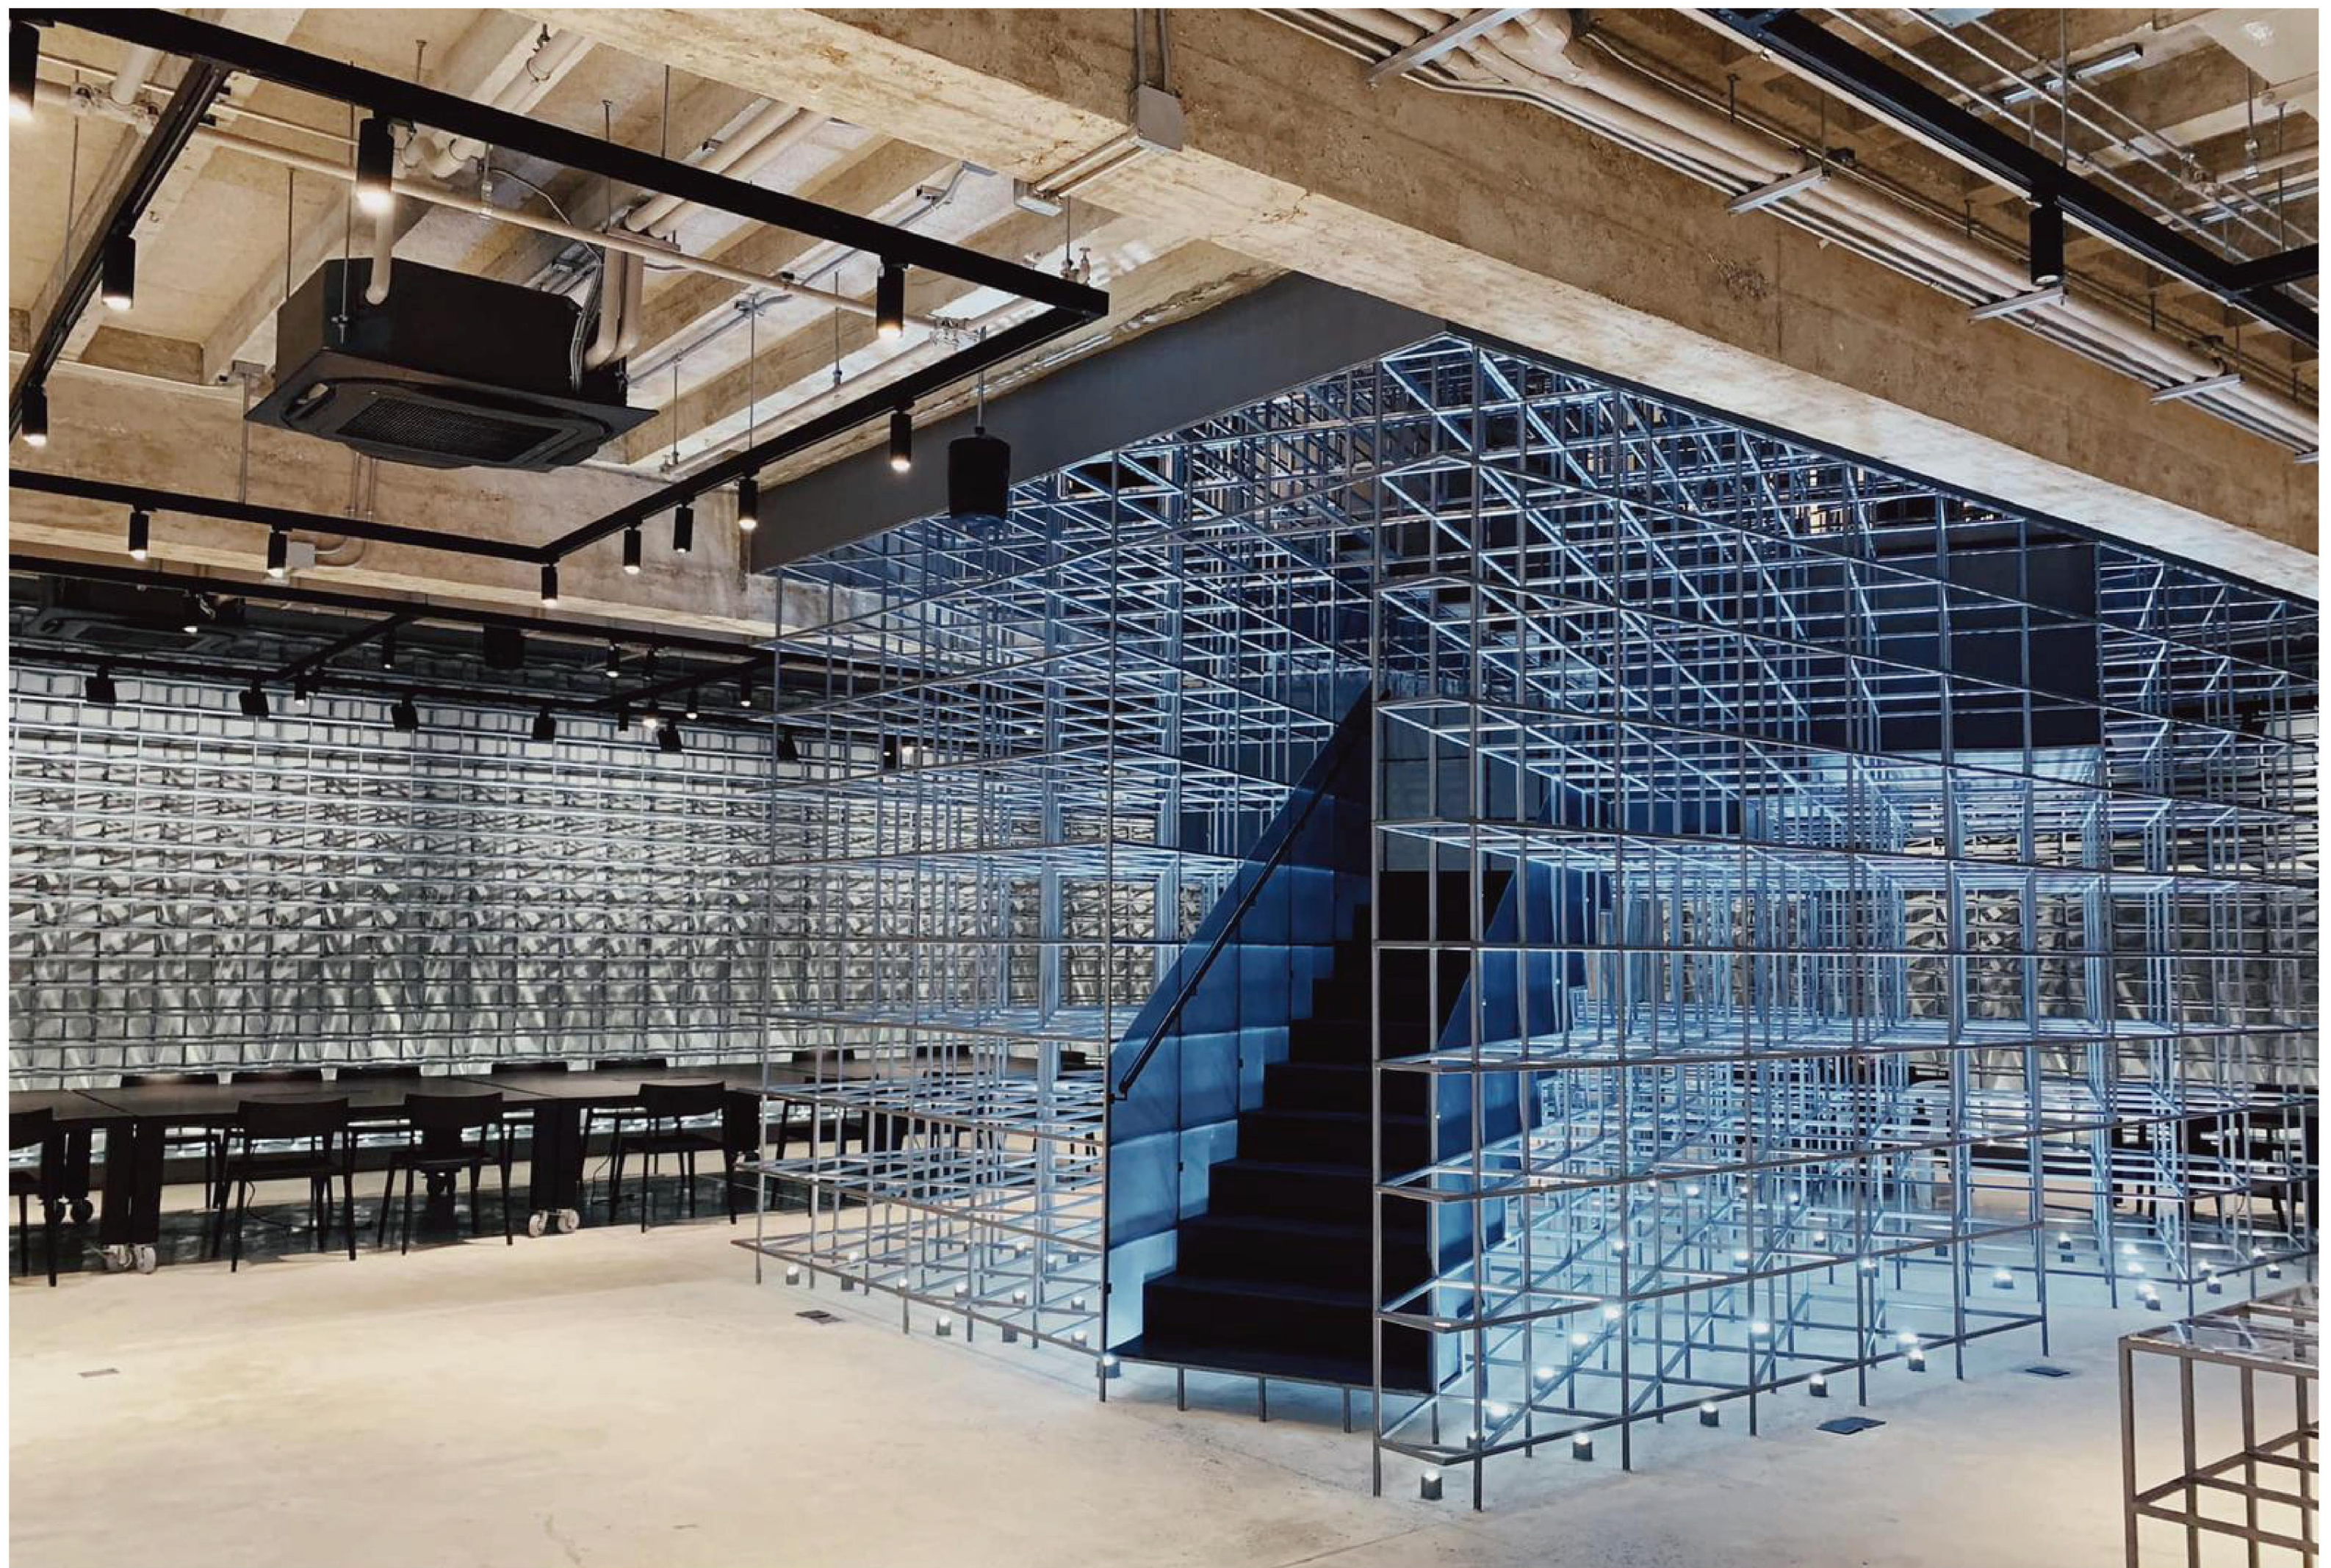



Surface mount



TUBE 10W T

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warrenty
- IP20



- WHITE
- BLACK

- 15° / 24° / 36°
- Rotation 355° Adjustable +/- 90°
- ON/OFF

Specification

Light Sources :	COB LED ARRAY
Input Voltage :	220-240V AC / 50-60Hz
Trim :	AL. Die-Casting, Electrostatic Powder Coating
Optics :	Lens
Reflector :	/
Heat Sink :	AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature :	-20 to +40°C
Driver Lifetime :	50,000 Hours
Mounting Track :	3-Circuit (4-Wire)

System Power	10.7W
LED Power	8.8W
Output Current	250mA
Output Voltage	35.2V DC
Color Consistency	3-SDCM
L.O.R.	0.8

CCT : 2700K ; CRI >90	822 lm
CCT : 3000K ; CRI >90	874 lm
CCT : 3500K ; CRI >90	894 lm
CCT : 4000K ; CRI >90	915 lm

remote ON/OFF driver

- Accessories
- HONEYCOMB
 - CLEARLENS
 - FROSTLENS

TRON

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warrenty
- IP20



- WHITE
- BLACK

- 40° / 60°
- Fixed angle
- ON/OFF, TRIAC, 1-10V, DALI

Specification

Light Sources :	COB LED ARRAY
Input Voltage :	220-240V AC / 50-60Hz
Trim :	AL. Die-Casting, Electrostatic Powder Coating
Optics :	AL Reflector
Reflector :	AL
Heat Sink :	AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature :	-20 to +40°C
Driver Lifetime :	50,000 Hours


System Power	TRON 10W	TRON 20W
LED Power	12.2W	21.3W
Output Current	10W	17.5W
Output Voltage	250mA	500mA
Output Voltage	32.8V DC	35V DC
Color Consistency	3-SDCM	3-SDCM
L.O.R.	0.8	0.8

CCT : 2700K ; CRI >90	1020 lm	1921 lm
CCT : 3000K ; CRI >90	1062 lm	2000 lm
CCT : 3500K ; CRI >90	1076 lm	2027 lm
CCT : 4000K ; CRI >90	1278 lm	2031 lm
CCT : 5000K ; CRI >80	1285 lm	2421 lm

- Accessories
- HONEYCOMB
 - CLEARLENS
 - FROSTLENS

TITAN 20W

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warranty
- IP65

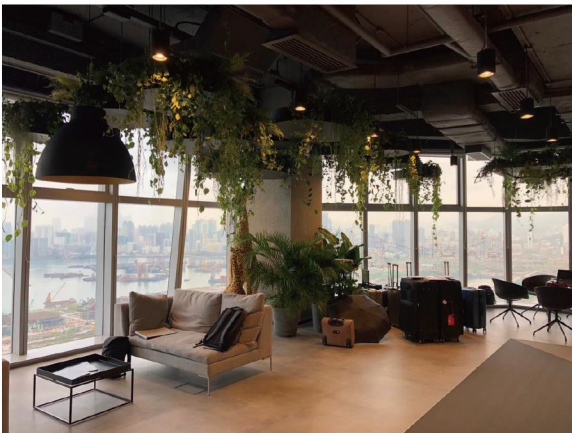

- WHITE
- BLACK


- CE
- 40° / 60°
- Fixed angle
- ON/OFF, TRIAC, 1-10V, DALI

Specification

Light Sources : COB LED ARRAY
Input Voltage : 220-240V AC / 50-60Hz
Trim : AL. Die-Casting, Electrostatic Powder Coating
Optics : AL Reflector
Reflector : AL
Heat Sink : AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature : -20 to +40°C
Driver Lifetime : 50,000 Hours

System Power	TITAN 20W
LED Power	20.5W
Output Current	16.8W
Output Voltage	500mA
Color Consistency	33.6V DC
L.O.R.	3-SDCM
	0.8
CCT : 2700K ; CRI >90	2062 lm
CCT : 3000K ; CRI >90	2144 lm
CCT : 3500K ; CRI >90	2175 lm
CCT : 4000K ; CRI >90	2176 lm
CCT : 5000K ; CRI >80	2597 lm

- Accessories
- HONEYCOMB
 - CLEARLENS
 - FROSTLENS



TITAN 30W/ 40W

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warranty
- IP65



- WHITE
- BLACK


- CE
- 40° / 60°
- Fixed angle
- ON/OFF, 1-10V, DALI

Specification

Light Sources : COB LED ARRAY
Input Voltage : 220-240V AC / 50-60Hz
Trim : AL. Die-Casting, Electrostatic Powder Coating
Optics : AL Reflector
Reflector : AL
Heat Sink : AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature : -20 to +40°C
Driver Lifetime : 50,000 Hours

System Power	TITAN 30W	TITAN 40W
LED Power	33W	45W
Output Current	28.2W	38.2W
Output Voltage	800mA	1050mA
Color Consistency	35.2V DC	36.4V DC
L.O.R.	3-SDCM	3-SDCM
	0.8	0.8
CCT : 2700K ; CRI >90	3148 lm	3982 lm
CCT : 3000K ; CRI >90	3272 lm	4139 lm
CCT : 3500K ; CRI >90	3321 lm	4200 lm
CCT : 4000K ; CRI >90	3322 lm	4202 lm
CCT : 5000K ; CRI >80	3965 lm	5016 lm

- Accessories
- HONEYCOMB
 - CLEARLENS
 - FROSTLENS



TITAN TW

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warranty
- IP65



- WHITE
- BLACK



40° / 60°



Fixed angle



DALI

Specification

Light Sources :	COB LED ARRAY
Input Voltage :	220-240V AC / 50-60Hz
Trim :	AL. Die-Casting, Electrostatic Powder Coating
Optics :	AL Reflector
Reflector :	AL
Heat Sink :	AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature :	-20 to +40°C
Driver Lifetime :	50,000 Hours

System Power	30.6W
LED Power	26W
Output Current	700mA
Output Voltage	37V DC
Color Consistency	5-SDCM
L.O.R.	0.8

CCT : 2700K ; CRI >90	2234 lm
CCT : 6500K ; CRI >90	2646 lm

Accessories




HONEYCOMB





CLEARLENS



FROSTLENS



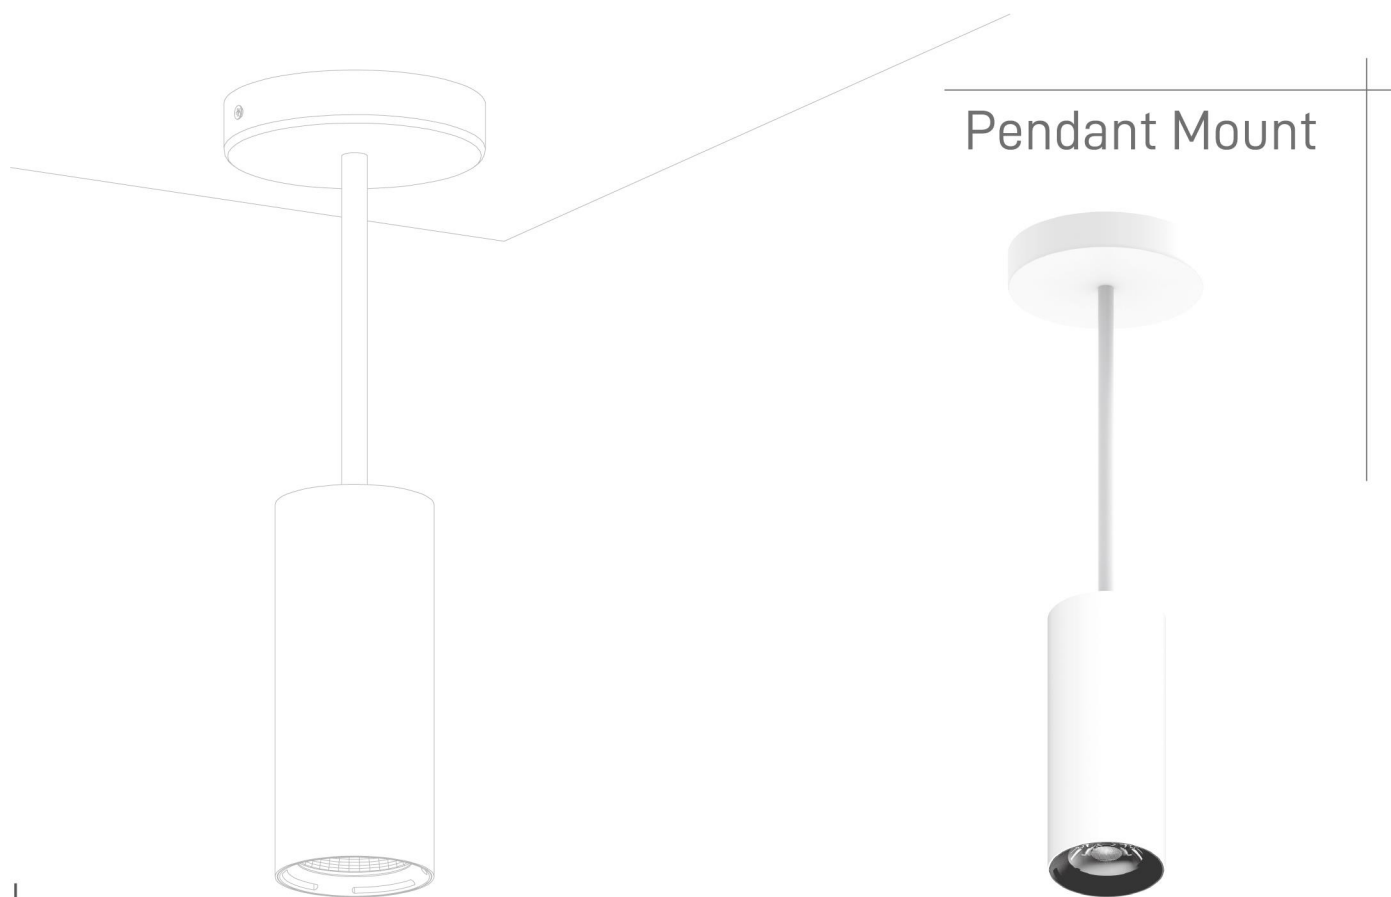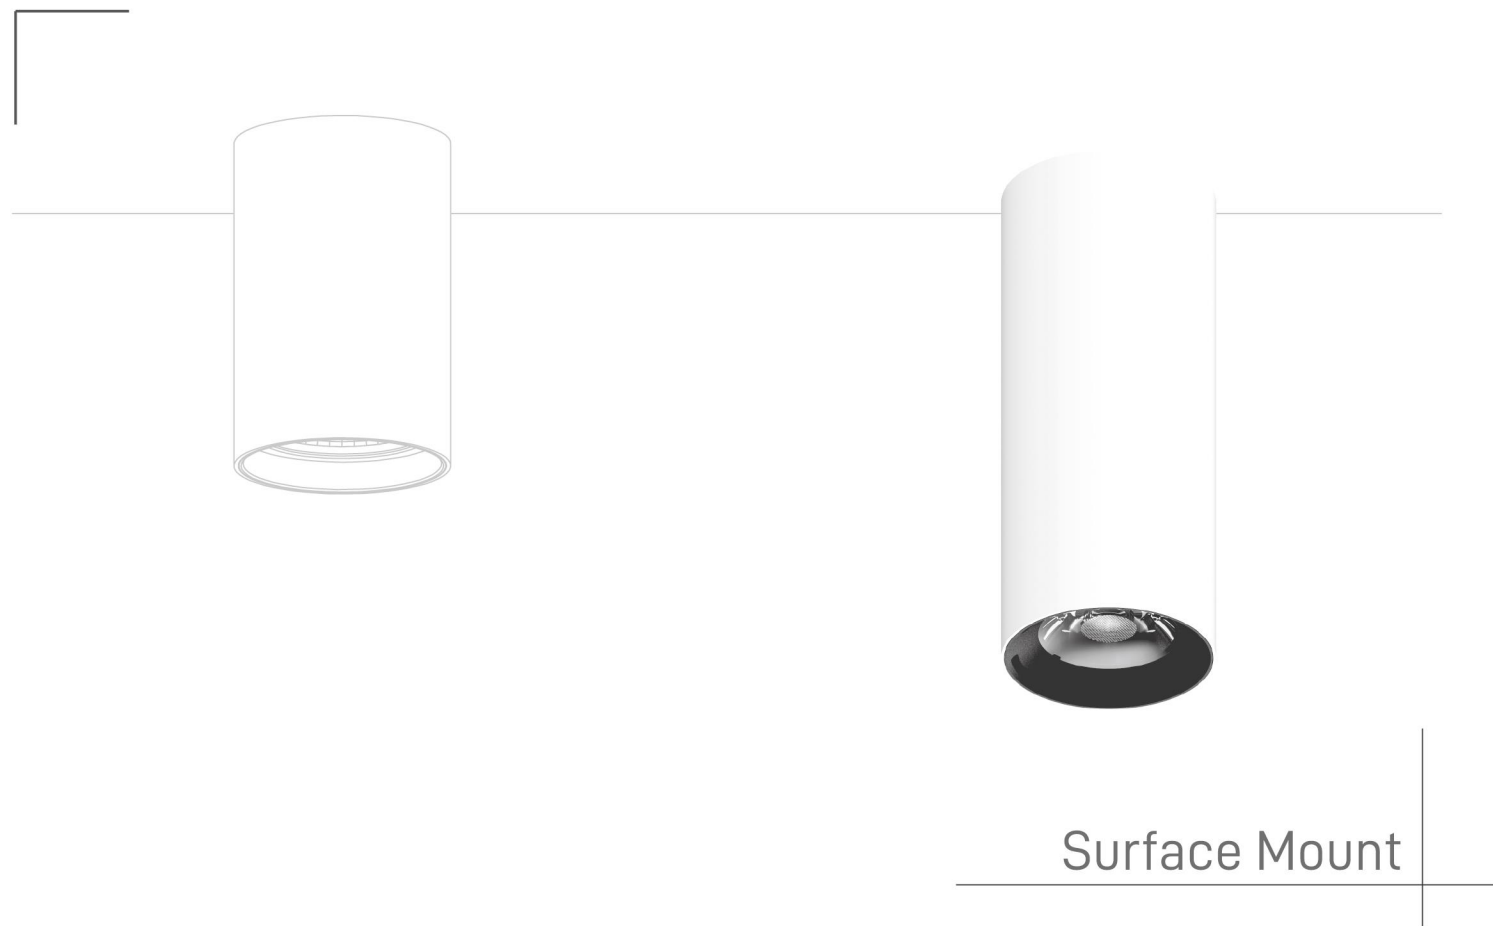

TEJAS LIGHTING

TRAC AC P/T/S

- Hi CRI

High Colour Rendering Index
- ☀

Ensured by low glare system
- ▮▮▮

Fixture with high efficacy LED
- 🕒

3 years warrenty
- 🔧

IP20



- WHITE

● BLACK
-

- CE

ON/OFF, TRIAC

Specification	
Light Sources :	COB LED ARRAY
Input Voltage :	220-240V AC / 50-60Hz
Trim :	AL. Die-Casting, Electrostatic Powder Coating
Optics :	PC Reflector
Reflector :	PC
Heat Sink :	AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature :	-20 to +40°C
Driver Lifetime :	30,000 Hours

System Power		TRAC AC 10W
LED Power	/	10W
Output Current	/	
Output Voltage	/	
Color Consistency	/	3-SDCM
L.O.R.		0.9
CCT : 2700K ; CRI >90	955 lm	
CCT : 3000K ; CRI >90	980 lm	
CCT : 4000K ; CRI >90	1015 lm	
CCT : 5000K ; CRI >90	1015 lm	

- Accessories
- HONEYCOMB

○ CLEARLENS

● FROSTLENS




TRAC AC 10W T

- ▮▮▮

15° / 25° / 40° / 60°
- ⬇

Rotation 355°
Adjustable +/- 90°
- 🔧

Surface Spotlight




TRAC AC 10W S

- ▮▮▮

15° / 25° / 40° / 60°
- ⬇

Fixed angle
- 🔧

Surface Downlight




TRAC AC 10W P

- ▮▮▮

15° / 25° / 40° / 60°
- ⬇

Fixed angle
- 🔧

Rod Pendant



TRAC 15W P/T/S

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warrenty
- IP20



- WHITE
 - BLACK
-



ON/OFF, TRIAC, 1-10V, DALI

Specification

Light Sources : COB LED ARRAY
Input Voltage : 220-240V AC / 50-60Hz
Trim : AL. Die-Casting, Electrostatic Powder Coating
Optics : Lens
Reflector : /
Heat Sink : AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature : -20 to +40°C
Driver Lifetime : 50,000 Hours

System Power 14.9W
LED Power 12.2W
Output Current 360mA
Output Voltage 33.8V DC
Color Consistency 3-SDCM
L.O.R. 0.9

CCT : 2700K ; CRI >90 1407 lm
CCT : 3000K ; CRI >90 1470 m
CCT : 3500K ; CRI >90 1508 lm
CCT : 4000K ; CRI >90 1514 lm
CCT : 5000K ; CRI >80 1860 lm

Accessories

- HONEYCOMB
- CLEARLENS
- FROSTLENS




TRAC PLUS Extension kit for replaceable diffuser




TRAC 15W T

- 15° / 25° / 40° / 60°
- Rotation 355°
Adjustable +/- 90°
- Surface Spotlight




TRAC 15W S

- 15° / 25° / 40° / 60°
- Fixed angle
- Surface Downlight



TRAC 15W P

- 15° / 25° / 40° / 60°
- Fixed angle
- Rod Pendant



TASS AC P/T/S

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 3 years warrenty
- IP20



ON/OFF, TRIAC



Specification

Light Sources : COB LED ARRAY
Input Voltage : 220-240V AC / 50-60Hz
Trim : AL. Die-Casting, Electrostatic Powder Coating
Optics : PC Reflector
Reflector : PC
Heat Sink : AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature : -20 to +40°C
Driver Lifetime : 30,000 Hours

System Power 13.8W
LED Power /
Output Current /
Output Voltage /
Color Consistency 3-SDCM
L.O.R. 0.9


CCT : 2700K	1245 lm	CRI >90
CCT : 3000K	1280 lm	CRI >90
CCT : 4000K	1330 lm	CRI >90
CCT : 5000K	1330 lm	CRI >90

Accessories




TASS AC 14W T

- 15° / 25° / 40° / 60°
- Rotation 355°
Adjustable +/- 90°
- Surface Spotlight




TASS AC 14W S

- 15° / 25° / 40° / 60°
- Fixed angle
- Surface Downlight



TASS AC 14W P

- 15° / 25° / 40° / 60°
- Fixed angle
- Rod Pendant



TASS 20W P/T/S

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warrenty
- IP20



- WHITE
 - BLACK
-

ON/OFF, TRIAC, 1-10V, DALI

Specification	
Light Sources :	COB LED ARRAY
Input Voltage :	220-240V AC / 50-60Hz
Trim :	AL. Die-Casting, Electrostatic Powder Coating
Optics :	Lens
Reflector :	/
Heat Sink :	AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature :	-20 to +40°C
Driver Lifetime :	50,000 Hours

System Power	21.3W
LED Power	17.5W
Output Current	500mA
Output Voltage	35V DC
Color Consistency	3-SDCM
L.O.R.	0.9

CCT : 2700K ; CRI >90	1921 lm
CCT : 3000K ; CRI >90	2000 m
CCT : 3500K ; CRI >90	2027 lm
CCT : 4000K ; CRI >90	2031 lm
CCT : 5000K ; CRI >80	2421 lm

Accessories

- HONEYCOMB
- CLEARLENS
- FROSTLENS




TASS PLUS Extension kit for replaceable diffuser




TASS 20W T

- 15° / 25° / 40° / 60°
- Rotation 355° Adjustable +/- 90°
- Surface Spotlight




TASS 20W S

- 15° / 25° / 40° / 60°
- Fixed angle
- Surface Downlight



TASS 20W P

- 15° / 25° / 40° / 60°
- Fixed angle
- Rod Pendant



TEDD 30W P/T/S

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warrenty
- IP20



- WHITE
 - BLACK
-



- ON/OFF, 1-10V, DALI

Specification

Light Sources :	COB LED ARRAY
Input Voltage :	220-240V AC / 50-60Hz
Trim :	AL. Die-Casting, Electrostatic Powder Coating
Optics :	Lens
Reflector :	/
Heat Sink :	AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature :	-20 to +40°C
Driver Lifetime :	50,000 Hours

System Power	30W
LED Power	25.4W
Output Current	750mA
Output Voltage	33.9V DC
Color Consistency	3-SDCM
L.O.R.	0.8

CCT : 2700K ; CRI >90	3000 lm
CCT : 3000K ; CRI >90	3119 lm
CCT : 3500K ; CRI >90	3164 lm
CCT : 4000K ; CRI >90	3166 m
CCT : 5000K ; CRI >80	3778 lm


Accessories

- HONEYCOMB
- CLEARLENS
- FROSTLENS




TEDD 30W T

- 15° / 25° / 40° / 60°
- Rotation 355°
Adjustable +/- 90°
- Surface Spotlight




TEDD 30W S


- 15° / 25° / 40° / 60°
- Fixed angle
- Surface Downlight




TEDD 30W P

- 15° / 25° / 40° / 60°
- Fixed angle
- Rod Pendant



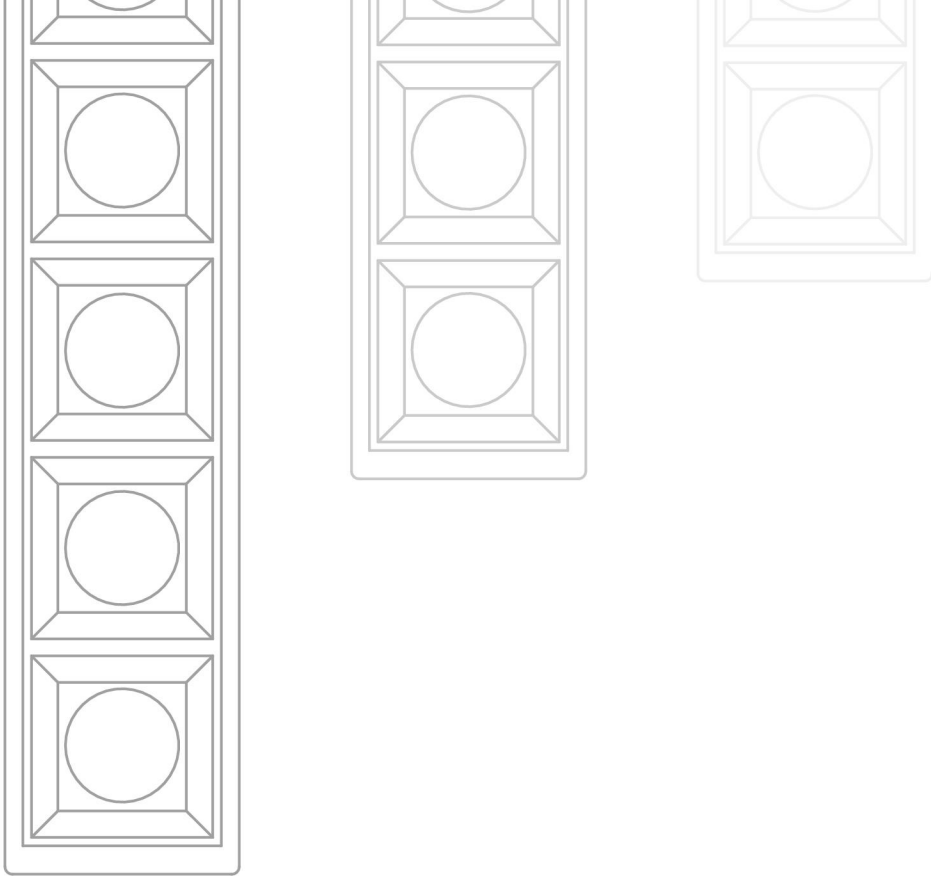


LINEAR

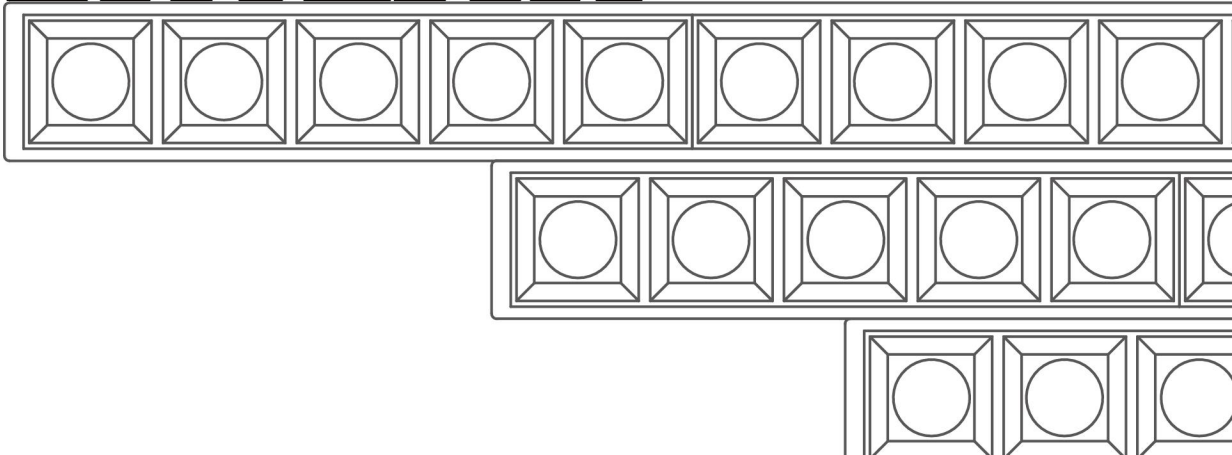

TARTAN

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 3 years warrenty
- IP20

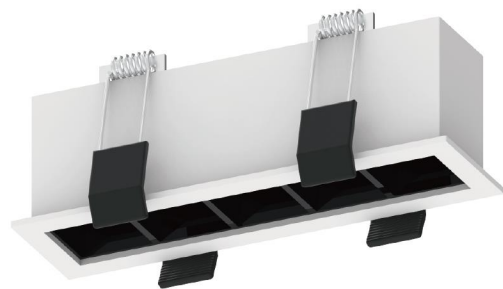

CE

15° / 30° / 45°

Fixed angle


ON/OFF, TRIAC, 1-10V, DALI



Specification



Light Sources : SMD
Input Voltage : 220-240V AC / 50-60Hz
Trim : AL. Die-Casting, Electrostatic Powder Coating
Optics : PC Reflector
Reflector : PC
Heat Sink : AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature : -20 to +40°C
Driver Lifetime : 50,000 Hours

	TARTAN 5	TARTAN 10	TARTAN 20
SMD	x5	x10	x20
System Power	6W	12W	24W
LED Power	5W	10W	20W
Output Current	150mA	300mA	600mA
Output Voltage	31.5V DC	31.5V DC	31.5V DC
Color Consistency	3-SDCM	3-SDCM	3-SDCM
CCT : 2700K ; CRI >90	550 lm	1100 lm	2200 lm
CCT : 3000K ; CRI >90	575 lm	1150 lm	2300 lm
CCT : 3500K ; CRI >90	600 lm	1200 lm	2400 lm
CCT : 4000K ; CRI >90	600 lm	1200 lm	2400 lm
CCT : 5000K ; CRI >90	600 lm	1200 lm	2400 lm
Cuthole L x W x H	139x35 mm 145x42x50 mm	272x35 mm 278x42x50 mm	544x35 mm 544x42x50 mm



TARTAN Trimless

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 3 years warrenty
- IP20

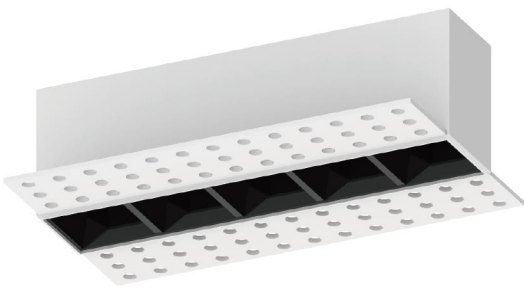

CE

15° / 30° / 45°

Fixed angle


ON/OFF, TRIAC, 1-10V, DALI



Specification


Light Sources : SMD
Input Voltage : 220-240V AC / 50-60Hz
Trim : AL. Die-Casting, Electrostatic Powder Coating
Optics : PC Reflector
Reflector : PC
Heat Sink : AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature : -20 to +40°C
Driver Lifetime : 50,000 Hours

	TARTAN Trimless5	TARTAN Trimless10	TARTAN Trimless20
SMD	x5	x10	x20
System Power	6W	12W	24W
LED Power	5W	10W	20W
Output Current	150mA	300mA	600mA
Output Voltage	31.5V DC	31.5V DC	31.5V DC
Color Consistency	3-SDCM	3-SDCM	3-SDCM
CCT : 2700K ; CRI >90	550 lm	1100 lm	2200 lm
CCT : 3000K ; CRI >90	575 lm	1150 lm	2300 lm
CCT : 3500K ; CRI >90	600 lm	1200 lm	2400 lm
CCT : 4000K ; CRI >90	600 lm	1200 lm	2400 lm
CCT : 5000K ; CRI >90	600 lm	1200 lm	2400 lm
Cuthole L x W x H	140x50 mm 140x102x42 mm	273x50 mm 273x102x42 mm	540x50 mm 540x102x42 mm



TARTAN S

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 3 years warrenty
- IP20

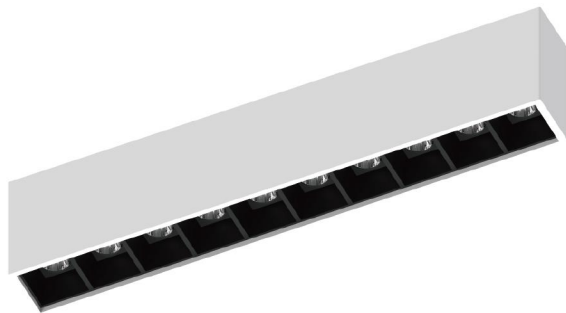

CE

15° / 30° / 45°

Fixed angle


ON/OFF, TRIAC, 1-10V, DALI



Specification

Light Sources : SMD
Input Voltage : 220-240V AC / 50-60Hz
Trim : AL. Die-Casting, Electrostatic Powder Coating
Optics : PC Reflector
Reflector : PC
Heat Sink : AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature : -20 to +40°C
Driver Lifetime : 50,000 Hours

	TARTAN S5	TARTAN S10	TARTAN S20
SMD	x5	x10	x20
System Power	6W	12W	24W
LED Power	5W	10W	20W
Output Current	150mA	300mA	600mA
Output Voltage	31.5V DC	31.5V DC	31.5V DC
Color Consistency	3-SDCM	3-SDCM	3-SDCM
CCT : 2700K ; CRI >90	550 lm	1100 lm	2200 lm
CCT : 3000K ; CRI >90	575 lm	1150 lm	2300 lm
CCT : 3500K ; CRI >90	600 lm	1200 lm	2400 lm
CCT : 4000K ; CRI >90	600 lm	1200 lm	2400 lm
CCT : 5000K ; CRI >90	600 lm	1200 lm	2400 lm
L x W x H	138x33x60 mm	270x33x60 mm	535x33x60 mm



TARTAN T

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 3 years warrenty
- IP20



CE

15° / 30° / 45°

Rotation 355°
Adjustable +/- 40°


ON/OFF, TRIAC, 1-10V, DALI



Specification

Light Sources : SMD
Input Voltage : 220-240V AC / 50-60Hz
Trim : AL. Die-Casting, Electrostatic Powder Coating
Optics : PC Reflector
Reflector : PC
Heat Sink : AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature : -20 to +40°C
Driver Lifetime : 50,000 Hours
Mounting Track : Single-Circuit (2-Wire) / 3-Circuit (4-Wire) / 3-Circuit (6-Wire)*DALI

	TARTAN T6	TARTAN T10
SMD	x6	x10
System Power	7W	12W
LED Power	6W	10W
Output Current	300mA	300mA
Output Voltage	19V DC	31.5V DC
Color Consistency	3-SDCM	3-SDCM
CCT : 2700K ; CRI >90	660 lm	1100 lm
CCT : 3000K ; CRI >90	690 lm	1150 lm
CCT : 3500K ; CRI >90	720 lm	1200 lm
CCT : 4000K ; CRI >90	720 lm	1200 lm
CCT : 5000K ; CRI >90	720 lm	1200 lm
L x W x H	115x25x138 mm	270x33x95 mm





TRAC 15W LV ρ.105



TUBE 10W ρ.106

48V

TRACK SYSTEM



TRAC 13W LV

- High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warrenty
- IP20

48V



○ WHITE
● BLACK



15° / 25° / 40° / 60°

Rotation 355°
Adjustable +/- 90°

ON/OFF, 1-10V, DALI


Specification

Light Sources :	COB LED ARRAY
Input Voltage :	48V
Trim :	AL. Die-Casting, Electrostatic Powder Coating
Optics :	Lens
Reflector :	/
Heat Sink :	AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature :	-20 to +40°C
Driver Lifetime :	50,000 Hours
Mounting Track :	Low Voltage Track

System Power	14.4W
LED Power	11.8W
Output Current	350mA
Output Voltage	33.7V DC
Color Consistency	3-SDCM

CCT : 2700K ; CRI >90	1393 lm
CCT : 3000K ; CRI >90	1450 m
CCT : 3500K ; CRI >90	1470 lm
CCT : 4000K ; CRI >90	1473 lm
CCT : 5000K ; CRI >80	1756 lm

Accessories

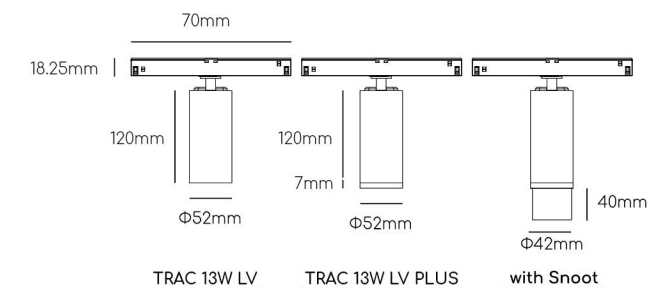


CITILED.
The Light Engine

TCI LED
professional led applications

TRAC PLUS Extension kit for replaceable diffuser

TUBE 10W

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warrenty
- IP20

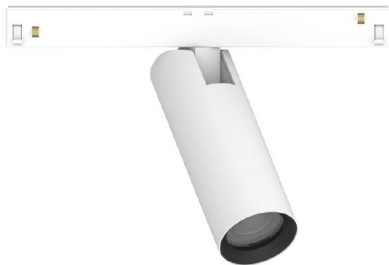

- WHITE
- BLACK

- 15° / 24° / 36°
- Rotation 355° Adjustable +/- 90°
- ON/OFF, 1-10V


Specification	
Light Sources :	COB LED ARRAY
Input Voltage :	48V
Trim :	AL. Die-Casting, Electrostatic Powder Coating
Optics :	Lens
Reflector :	/
Heat Sink :	AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature :	-20 to +40°C
Driver Lifetime :	50,000 Hours
Mounting Track :	Low Voltage Track

System Power	10.7W
LED Power	8.8W
Output Current	250mA
Output Voltage	35.2V DC
Color Consistency	3-SDCM

CCT : 2700K ; CRI >90	822 lm
CCT : 3000K ; CRI >90	874 lm
CCT : 3500K ; CRI >90	894 lm
CCT : 4000K ; CRI >90	915 lm


Accessories

- HONEYCOMB
- CLEARLENS
- FROSTLENS



TUBE 10W EX

- Hi CRI High Colour Rendering Index
- Ensured by low glare system
- Fixture with high efficacy LED
- 5 years warrenty
- IP20

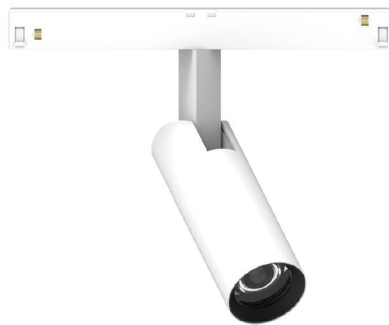

- WHITE
- BLACK

- 15° / 24° / 36°
- Rotation 355° Adjustable +/- 90°
- ON/OFF, 1-10V


Specification	
Light Sources :	COB LED ARRAY
Input Voltage :	48V
Trim :	AL. Die-Casting, Electrostatic Powder Coating
Optics :	Lens
Reflector :	/
Heat Sink :	AL. Die-Casting, Electrostatic Powder Coating
Operating Temperature :	-20 to +40°C
Driver Lifetime :	50,000 Hours
Mounting Track :	Low Voltage Track

System Power	10.7W
LED Power	8.8W
Output Current	250mA
Output Voltage	35.2V DC
Color Consistency	3-SDCM



CCT : 2700K ; CRI >90	822 lm
CCT : 3000K ; CRI >90	874 lm
CCT : 3500K ; CRI >90	894 lm
CCT : 4000K ; CRI >90	915 lm

Accessories

- HONEYCOMB
- CLEARLENS
- FROSTLENS



DRIVER BOX

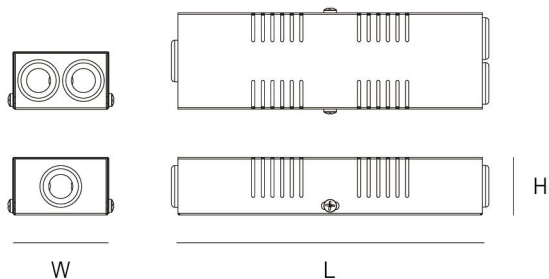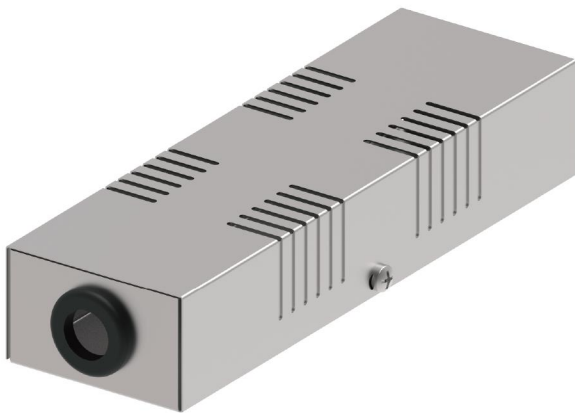

TYPE	L	W	H
XS	170	43	33
S	200	55	30
M	200	50	40
L	200	60	35
XL	220	85	40

MODEL

TORRES XS
TORRES S Series
TORRES M Series
TADDEO I Series
TONI
T-BOX SIN
T-BOX DOU
TYCO 8 MAX
TORCH TRIMLESS
TYCO 4
TYCO 6
TYCO 8
TUBO
TORCH 2W/ 6W /8W
TADDEO I /AJ /W
TADDEO I WS
TADDEO III
TADDEO 80
TADDEO 80T
TADDEO 100
TADDEO 100V2
TZAR 65
TZAR 65T
TOPS WG

BOX TYPE

XS
S
S / M / L / XL
S / M / L
S / M / L / XL
S / M / L / XL
S / M / L / XL
S / M / L / XL
/
S / M / L / XL
S / M / L / XL
S / M / L / XL
/
/
S / M / L
S / M / L
S / M / L / XL
S / M / L
S / M / L
S / M / L / XL
S / M / L / XL
S
S / M / L
S / M / L / XL